Flush-mount wall frame and frame holder for 1 double element aluminium Simon 500 Cima

REF. **51010101-033**



BASIC INFORMATION

FINISH
Aluminium

MATERIAL
Aluminium

COMPATIBILITY
Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms using a specific adaptor

PACKAGING CONTENTS
Flush-mount wall frame, frame holder and installation manual

ETIM CLASS
EC000007

REMARKS
Optionally, the frame holder can be screwed on to the box if a more secure installation is required.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
1, 2, 3, 4 and 6 double elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housing fitted into the box for this purpose.

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION
07

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
2

RECESS DIMENSION (MM)
141 x 73 mm

VERSION
1 double element

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
By direct snap-fit in the selected box (no tools needed for fastening)

REMOVAL OF THE FRAME
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for flush mounting on the wall

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.115

PRODUCT NET WEIGHT
0.115

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053091777

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
170

PACKAGING WIDTH
165

PACKAGING LENGTH
200

PACKAGING MEASUREMENT UNIT
MMT

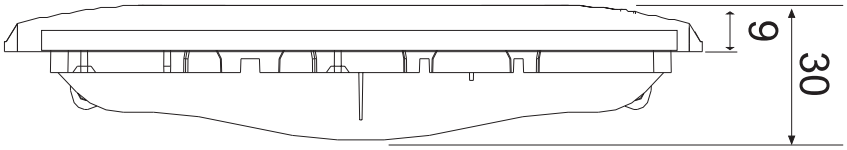
PACKAGING VOLUME
5.61

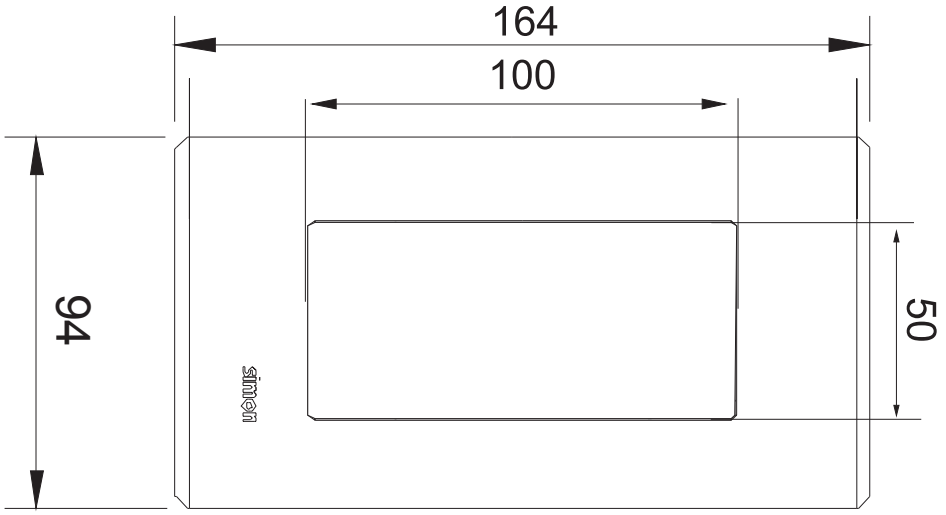
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.15

PACKAGING WEIGHT UNIT
KGM


9
30


164
100
94
50
sinter