

## Simon iO blinds switch with slender rocker 700 VA bronze Simon 270

REF. 21001333-097



### BASIC INFORMATION

#### FINISH

Bronze

#### SYMBOL

Arrow

#### MATERIAL

Thermoplastic

#### COMPATIBILITY

Simon 270 frames

#### PACKAGING CONTENTS

iO Blinds Switch and instruction sheet

#### ETIM CLASS

EC000044

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### IP RATING

IP20

### OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

### CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

### LATCH TYPE

Electric

### POWER SUPPLY (V~)

230 V~

### NUMBER OF POSSIBLE ELEMENTS

1 element

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### RAL

3033

### FREQUENCY

50 - 60 Hz

### STORAGE TEMPERATURE RANGE (°C)

-20 - 85 °C

### INDICATOR FUNCTION

Yes

### TYPE OF MECHANISM

Pivoting

### VOLTAGE (V~)

127/230 V~

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)

7

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

### INSTALLATION TYPE

Suitable for flush mounting

### INSTALLATION DIRECTION

Horizontal, Vertical

### TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

## REGULATIONS

### REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | Dir. 2014/53/UE RED | EN 50428:2005 | EN 50428:2005 A1:2007 | EN 50428:2005 A2:2009 | EN IEC 63000:2018 | ETSI EN 300328 V2.2.2

## LOGISTICS INFORMATION

UNITARY EAN CODE

8421053282076

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053282076

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0.083

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.083

UNITARY PACKAGING GROSS  
WEIGHT

0.083

PACKAGING LENGTH


55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.083

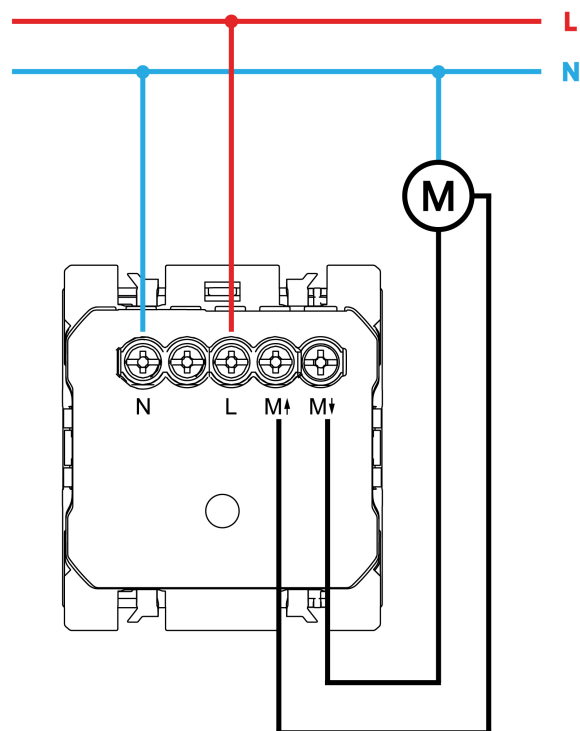

Para información más detallada consultar la hoja de instrucciones  
For more detailed information check the instruction sheet