Euro-American socket gloss black Simon 100

REF. **10000439-138**



BASIC INFORMATION

FINISH
Gloss black

COMPATIBILITY
Frames Simon 100

ETIM CLASS
EC000125

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

FORMAT
Euro-American

INDICATOR FUNCTION
No

CURRENT (A)
16 A

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Insertion

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
127/250 V~

OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

POWER SUPPLY (V~)
127/250 V~

STORAGE TEMPERATURE RANGE (°C)
-25 - 75 °C

VERSION
Unique

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
10

CLAW

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
universal

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS
IEC 60884-1 Ed 3.2 + NMX-J-412-1-ANCE 2011 + NMX-J-163-ANCE 2004 + IEC 60884-1 Ed 3.2 + NMX-J-412-1-ANCE 2011 + NMX-J-163-ANCE 2004

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.026

PRODUCT NET WEIGHT
0.026

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053192283

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
75

PACKAGING WIDTH
88

PACKAGING LENGTH
158

PACKAGING MEASUREMENT UNIT
MMT

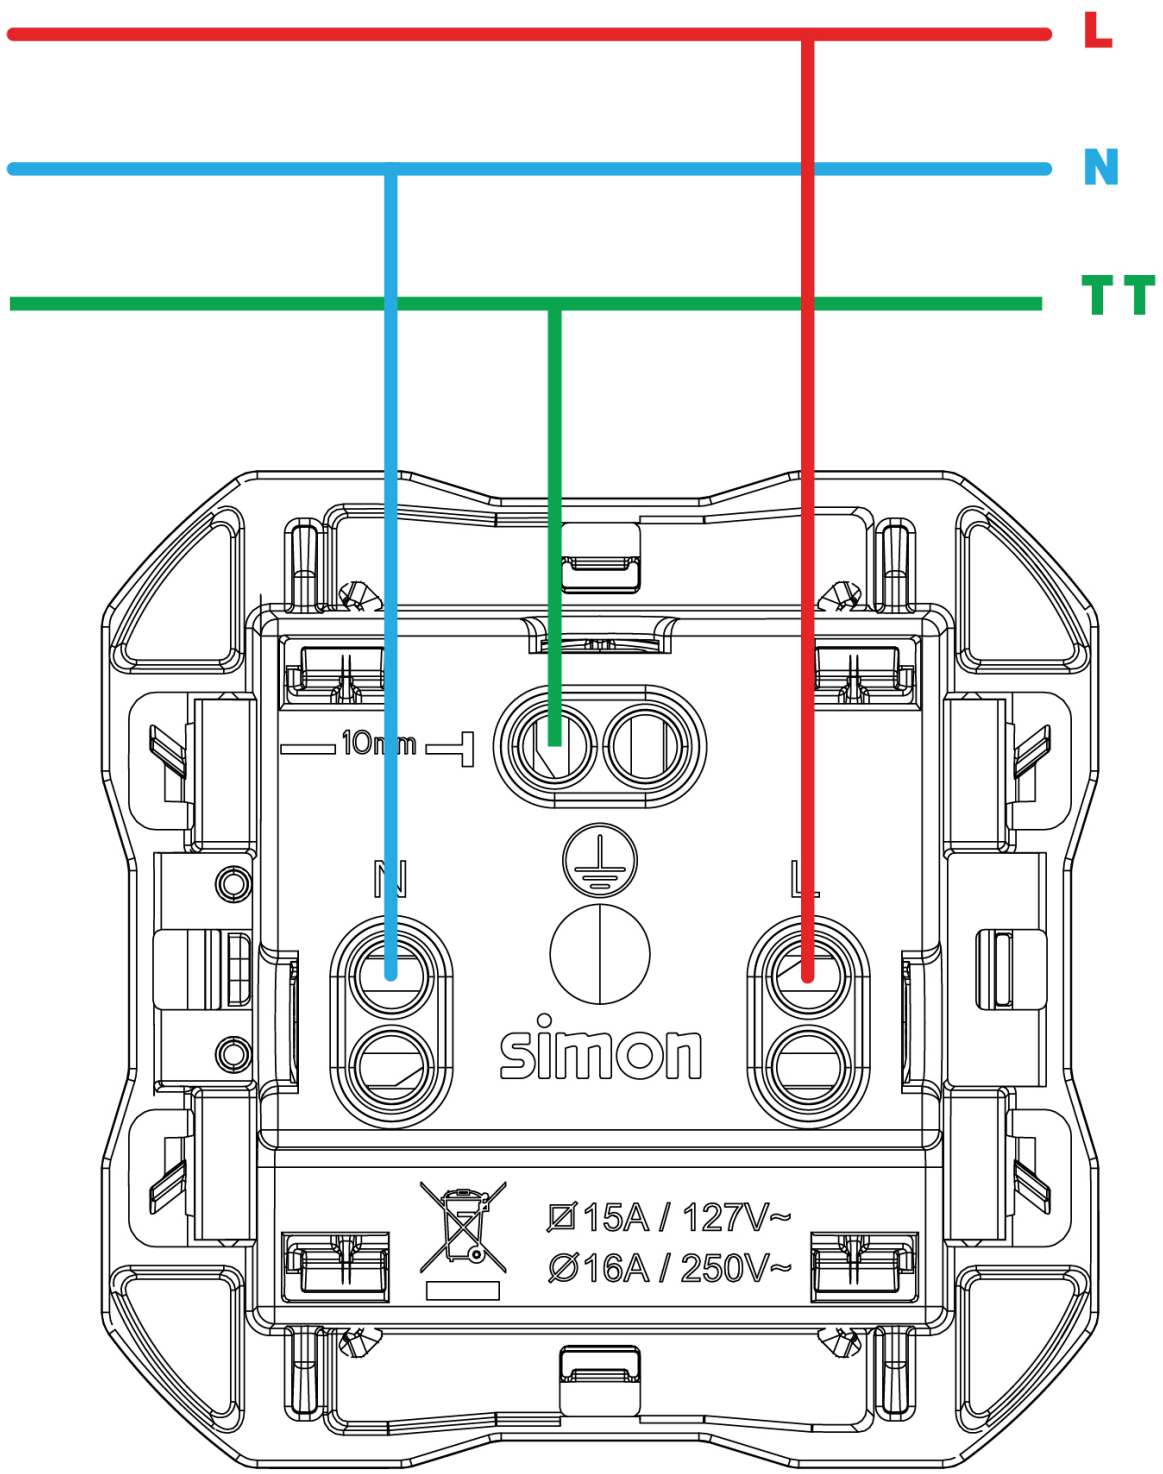
PACKAGING VOLUME
1042800

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.255

PACKAGING NET WEIGHT
0.13

PACKAGING WEIGHT UNIT
KGM


L
N
T T
10mm
N
L
simon
15A / 127V~
16A / 250V~