


Schuko socket base with double USB C + C charger 20W Simon 75

REF. 7541432-039

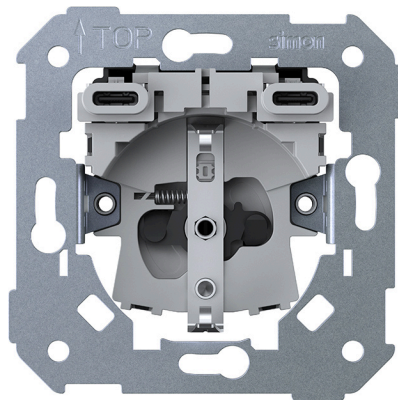

BASIC INFORMATION

DESCRIPTION

Schuko socket base with built-in double USB type C+C charger, ideal for combining power socket and fast charging of electronic devices in a single mechanism. This schuko socket with USB C allows you to power electrical equipment and directly charge smartphones, tablets, and devices compatible with Power Delivery (PD) without the need for additional adapters. It incorporates a schuko socket 16 A 250 V~ 50-60 Hz and two USB type C ports with output 5, 9, 12, 15, and 20 Vdc, offering optimized charging according to the profile of the connected device. Perfect solution as a flush-mounted socket with USB charger in residences, offices, hotels, and commercial spaces where modern and functional charging points are required. Connection system via terminal connection to screw, allowing conductor cross-section from 1.5 to 2.5 mm². Mechanism is flush-mounted in a universal box occupying 1 double element, suitable for surface or flush installation in a horizontal position. Protection rating IP20 and dielectric strength 3750 Vac. Operating temperature range from 0 to 35 °C. Aesthetically and mechanically compatible with the Simon 75 series and compatible frames, allowing integration of a USB type C socket of professional design in any electrical project.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

ETIM CLASS

EC000125

REMARKS

The mechanism includes the child protection function.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS	LINKABLE	USB CURRENT (A)
2	Yes	1,6 A
CONNECTOR TYPE	MAXIMUM POWER (W)	USB PORT TYPE
Schuko,USB C	4000	C
NUMBER OF CONTACTS	MONOBLOCK	POWER DELIVERY USB
3	No	Yes
FORMAT	NOMINAL VOLTAGE (V~)	QUICK CHARGE USB
Schuko,USB C	230 V~	Yes
FREQUENCY	PLATE TYPE	USB VOLTAGE (V~)
50 - 60 Hz	Flat	5/12 V~
INDICATOR FUNCTION	RECESS DIMENSION (MM)	VOLTAGE (V~)
No	45	230 V~
CURRENT (A)	USB CHARACTERISTICS	NUMBER OF WIRES
16 A	2 USB = 5,0 VDC 3,0 A 15,0 W ; 1 USB = 5,0 VDC 3,0 A 15,0 W / 9,0 VDC 2,2 A 19,8 W / 12,0 VDC 1,7 A 20,4 W	3
IP RATING		
IP20		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)	REMOVAL OF COVER	TYPE OF TERMINAL CONNECTION - FUNCTION 2
10	Only with tool	Schuko/USB: Screw
CLAW	TYPE OF TERMINAL CONNECTION - FUNCTION 1	
Simon 75	Screw	

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053438824

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.1

PRODUCT NET WEIGHT

0.08

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053438824

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

329232

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.104

PACKAGING NET WEIGHT

0.08

PACKAGING WEIGHT UNIT

KGM

