Flat voice and data plate with dust cover for 2 RJ45 Nexans® for 1 element white Simon 500 Cima

REF. **50018089-030**



BASIC INFORMATION

DESCRIPTION

Simon 500 CIMA joins Nexans to give your space of work of the highest quality and functionality in data transmission thanks to the flat base plate with dust cover with 1 element and 2 RJ45 Nexans 1 component. With finishes in white, its design is prepared for installation in enclosures horizontal and vertical with direct snap-fit without the need of adapter. With an optimal bending radius for the transmission speed, the flat base plate 500 Cima, accepted cabling 22-26 AWG and their connectors have to be RJ45 Nexans. Composed of thermoplastic self-extinguishing halogen-free, it provides security to the space is a possible fire, reaching to reach temperatures of 5ºC and 60 ° C. Also, the 500 Cima separating cabling electrical, voice, data and multimedia to delete interference and transmission errors. Simon 500 Cima is a guarantee of security, innovation and functionality.

FINISH

White

PACKAGING CONTENTS

Flat voice and data plate with dust cover

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

COMPATIBLE WITH CONNECTORS
Nexans® LANmark®-5 EVO, LANmark®-6 EVO.

RJ45 CONNECTORS
Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
1

PLATE TYPE
Flat

RAL
9003

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
RJ45 Nexans® connectors

SNAP-FIT TYPE
RJ45 Nexans® connectors

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.033

PRODUCT NET WEIGHT
0.033

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053097069

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
54

PACKAGING WIDTH
52

PACKAGING LENGTH
215

PACKAGING MEASUREMENT UNIT
MMT

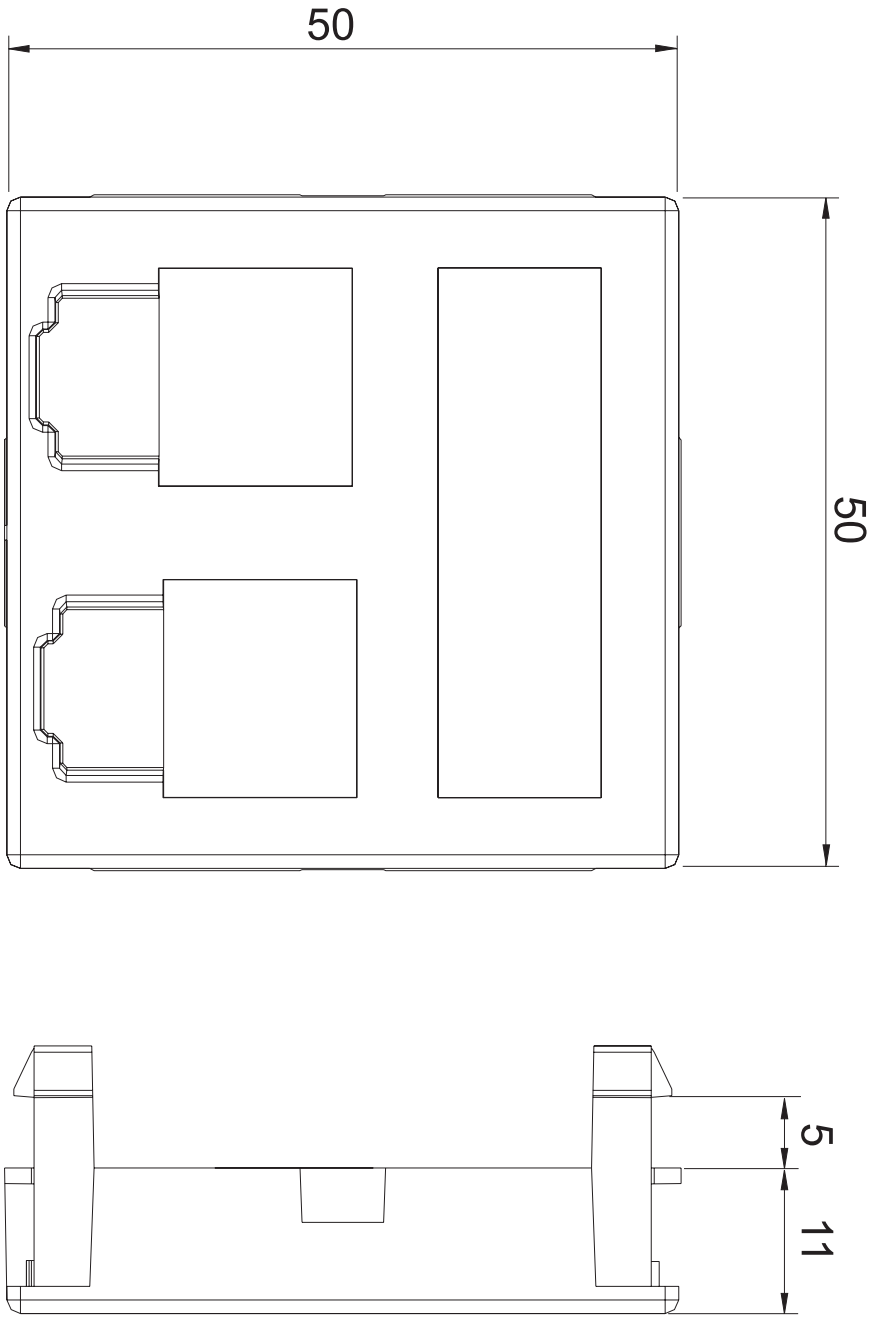
PACKAGING VOLUME
0.604

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.33

PACKAGING WEIGHT UNIT
KGM


50
50
5
11