

Modular luminaire 726 120x30 NW

REF. 72661033-884



BASIC INFORMATION

DESCRIPTION

This modular luminaire 726 120 x 30 is part of the Simon series of modular luminaires 726. The colour of the lights LED of the product is neutral (NW) and the colour of the same is 4000 K. It has 3200 lumens and 39 W power. The optics from the luminaire is Opal. It is a product of indoor lighting category B and high quality, its power supply is 220 -240 V and has a frequency of 50-60. The electric control of the luminaire indoor Simon is performed by ON-OFF. It can withstand extreme temperatures, ranging from -15 degrees centigrade and the + 40 degrees centigrade. The luminaire is presented in a beautiful and stylish finished in aluminium colour, perfect for any space that is worthwhile. Weight/Weight a total of 2,6 kilos and its exact dimensions are 1195 x 295 millimetres. The installation you must perform in false ceiling with the hardware.

DIFFUSER MATERIAL

PMMA

PACKAGING CONTENTS

1 unit

APPLICATION

General lighting

ETIM CLASS

EC002892

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DRIVER INCLUDED

Yes

LUMENS (LM)

3200 lm

IP RATING

IP20

ELECTRICAL CLASS

Type 2

LUMENS/W

3200 lm/39W

OPERATING TEMPERATURE RANGE (°C)

-15 - 40 °C

INTEGRATED POWER SUPPLY

No

OPTICS

General

POWER SUPPLY (V~)

220/240 V~

L70 (°C)

30,000 h at 25 °C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

COLOR TEMPERATURE (K)

4000 K

LIGHT BEAM APERTURE ANGLE (°)

120°

POWER (W)

39 W

CONTROL

On/Off

COLOR TYPE

NW

SERVICE LIFE

30.000 h

CRI

80

LIGHTING EFFICIENCY (LM/W)

82 lm/W

CHROMATICS CRI ICONS

CRI
80


PHOTOMETRY ASSETS – CONICAL

0.5	1.37 1.43	E(0°) E(C90) E(C0)	53.9° 55.0°	4696 482 444
1.0	2.74 2.86	E(0°) E(C90) E(C0)	53.9° 55.0°	1174 120 111
1.5	4.11 4.28	E(0°) E(C90) E(C0)	53.9° 55.0°	522 54 49
2.0	5.49 5.71	E(0°) E(C90) E(C0)	53.9° 55.0°	293 30 28
2.5	6.86 7.14	E(0°) E(C90) E(C0)	53.9° 55.0°	188 19 18
3.0	8.23 8.57	E(0°) E(C90) E(C0)	53.9° 55.0°	130 13 12

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]

— C0 - C180 (Semiángulo de dispersión: 110.0°)
 — C90 - C270 (Semiángulo de dispersión: 107.8°)

PHOTOMETRY ASSETS – POLAR

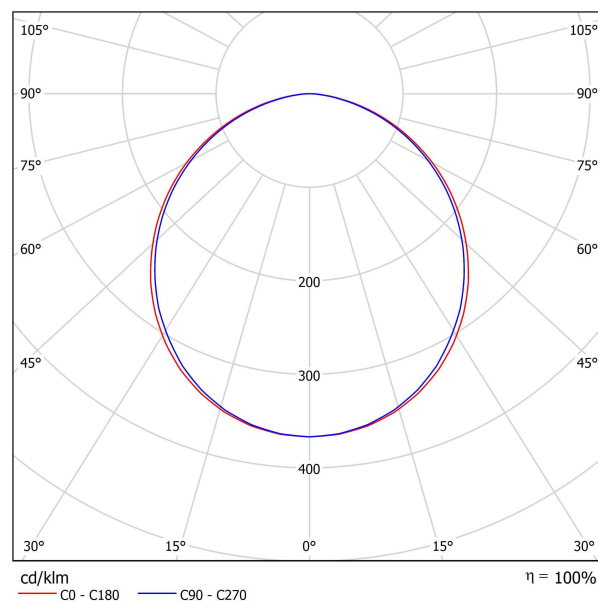

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Plaster ceiling, surface mount, flush mount, concealed profile and suspended

MINIMUM INSTALLATION HEIGHT

250

INSTALLATION TYPE

False ceiling, visible hardware

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Screw

REGULATIONS

WARRANTY

3 years 30,000 h

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053194065

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

3.2

PRODUCT NET WEIGHT

2.4

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053194065

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

1281

PACKAGING WIDTH

40

PACKAGING LENGTH

350

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

2579500

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

3200

PACKAGING NET WEIGHT

2.4

PACKAGING WEIGHT UNIT

KGM