ARCH Downlight Trimless Round 4000 K Flood White

REF. **91563002-400**



BASIC INFORMATION

FINISH	APPLICATION	PACKAGING DIMENSIONS (MM)
White	Domestic,Office,Retail,Hotel,Contract	116x224x171 mm
BODY MATERIAL	**PACKAGING CONTENTS**	**ETIM CLASS**
Die-cast aluminium	1 Unit	EC001744

TECHNICAL INFORMATION

FREQUENCY
50 - 60 Hz

IP RATING
IP20

OPERATING TEMPERATURE RANGE (°C)
0 - 35 °C

POWER SUPPLY (V~)
110/240 V~

RAL
9016

COLOR TEMPERATURE (K)
4000 K

CRI
80

DIRECTIONAL
Yes

DRIVER INCLUDED
No

ELECTRICAL CLASS
II

ENERGY EFFICIENCY
A+

L70 (°C)
100000h at 25°C

L90 (°C)
30000h at 25°C

COLOR TYPE
CW

LIGHTING EFFICIENCY (LM/W)
111 lm/W

LUMENS (LM)
900 lm

NUMBER OF LUMINAIRES
1

MACADAM STEPS
<3 Step MacAdam


OPTICS
Flood 36°

PHOTOBIOLOGICAL CLASSIFICATION
Class II

POWER FACTOR (Φ)
> 0,9

POWER (W)
9 W

PHOTOMETRY ASSETS – POLAR

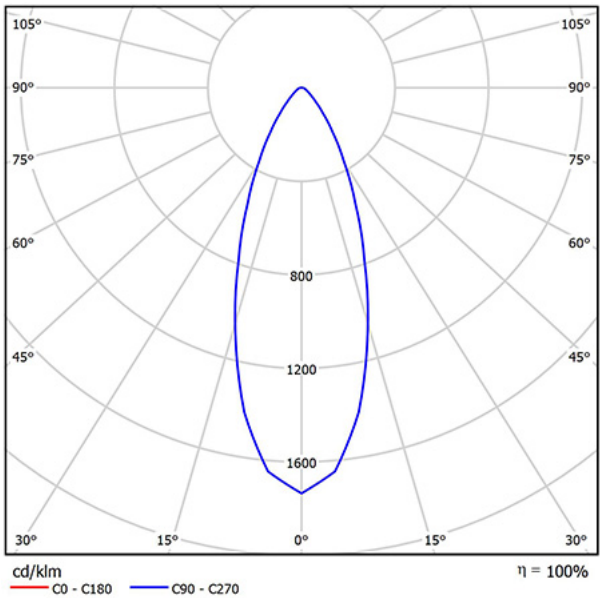

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Flush-mounted, Surface-mounted

INSTALLATION TYPE

Trimless

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

No

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE
8436547035991

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
2.475

UNITARY PACKAGING VOLUME UNIT
DMQ

UNITARY PACKAGING GROSS WEIGHT
0.9

PRODUCT NET WEIGHT
0.719

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8436547035991

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
116

PACKAGING WIDTH
171

PACKAGING LENGTH
224

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
4528125

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.99

PACKAGING NET WEIGHT
0.719

PACKAGING WEIGHT UNIT
KGM