


Mechanism-holder unit IP66 with manual lock and Italian socket P40 socket outlet brass Simon K45

REF. KSE3/23/71

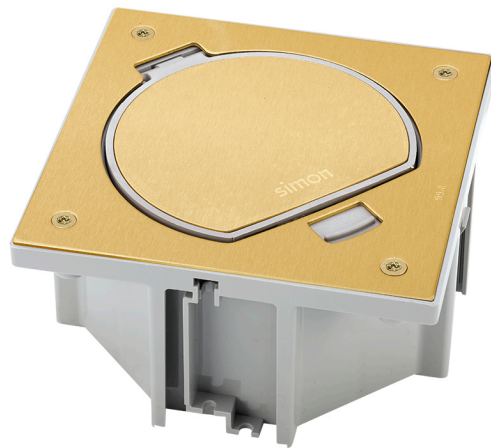

BASIC INFORMATION

DESCRIPTION

This mechanism-holder unit unit has a manual closure and incorporates a Italian P40 socket-outlet with dimensions of 130 x 130 x, 55 mm, made of metal materials of high quality and brass finish presents a single version for one element with capacity for 2 modules. You can be integrated into any type of raised or concrete floor combining the mechanism-holders unit with the tray in accordance with the type of installation (ref. KGE170 for concrete floor, and ref. KGE170TF for raised floor). The socket for standard current circuit with 16 A current and 250V ~ voltage is by screw, signaling function of insertion and the snap-fit is of type Keystone I and II. The wire cross-section understood between 1.5 mm and 2.5 mm and stripping of wire of 12mm. The cover has anchor points to protect the connections during use against pressures and stresses produced by the passage of personnel. The baseboard is manufactured in self-extinguishing thermoplastic providing a great security against the fire, propagation of the same and guarantees the no-propagation of fumes toxic.

FINISH

Brass

MATERIAL

Metal

ETIM CLASS

EC000024

REMARKS

The cover has anchor points that protect the connections during use against pressures and stresses due to the passage of personnel.

TECHNICAL INFORMATION

FORMAT

Italian

CURRENT (A)

16 A

RECESS DIMENSION (MM)

145 x 145 mm en suelo técnico

IK CLASSIFICATION

07

IP RATING

IP66

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

REMOVAL OF COMPONENTS

Only with tool

NUMBER OF COVER OPENING POSITIONS

1

REMOVAL OF COVER

Only with tool

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

REMOVAL OF THE FRAME

Only with tool

CAN BE INSTALLED IN TRAY

Plastic

REMOVAL OF THE SOCKET

Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053333822

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.436

PRODUCT NET WEIGHT

0.362

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053333822

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

82

PACKAGING WIDTH

147

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1445213

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.436

PACKAGING NET WEIGHT

0.362

PACKAGING WEIGHT UNIT

KGM