


COOL Downlight front Primer

REF. 91091299-099

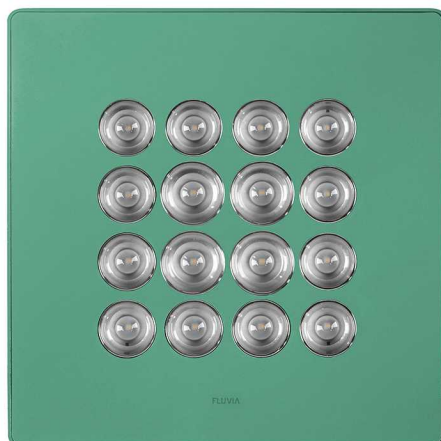

BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC001744

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

6x224x224 mm

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

POWER SUPPLY (V~)

100/240 V~

ENERGY EFFICIENCY

A+

IP RATING

IP20

DIRECTIONAL

No

LIGHTING EFFICIENCY (LM/W)

83 lm/W

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

DRIVER INCLUDED

Yes

POWER FACTOR (Φ)

0,9

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Surface-mounted / Flush-mounted

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

No

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547086290

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.42

PRODUCT NET WEIGHT

0.42

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8436547086290

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

7

PACKAGING WIDTH

245

PACKAGING LENGTH

245

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.238

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.42

PACKAGING NET WEIGHT

0.42

PACKAGING WEIGHT UNIT

KGM