2-way switch 10AX 250V~ for half element with built-in pilot light and fast terminal connection system white Simon 27 Play

REF. **27202-64**



BASIC INFORMATION

DESCRIPTION

2-way switch of the Simon 27 Play series white in colour, half element, with pilot and quick terminal connection system. It works with a voltage of 250V and its current is 10 AX, in addition to offering a tilting type operation. This 2-way switch, it can be surface or flush-mounted and is fully compatible with the frames of the series Simon 27 Neos, Simon 27 Play, Simon 27, Simon 27 Scudo, Simon 27 Centralizations and Simon 44 Aqua. It can also be combined with the reference 2700802-037 if had to replace the indicator light. It supports a cable section of 1.5 to 2.5 mm with a stripped 11mm. For its design have been followed by the following standards EN 60669-1: 1999 + A1: 2002 + A2: 2008 + EN 50581: 2057 and is manufactured with metal components with halogen-free thermoplastic insulation and thermoset trim. It measures 22.5x45 mm and to clean it will only have to use a dry and soft cloth and never use abrasive cleaners containing chlorine.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Can be combined with article 2700802-037 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)

0.55 mA

NUMBER OF POSSIBLE ELEMENTS

Half element

INDICATOR FUNCTION

Yes

CURRENT (A)

10 AX

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Pivoting

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American, Small spaces and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
1229865

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.027

PRODUCT NET WEIGHT
0.027

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053035962

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
53

PACKAGING WIDTH
105

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1229865

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0.545

PACKAGING NET WEIGHT
0.54


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

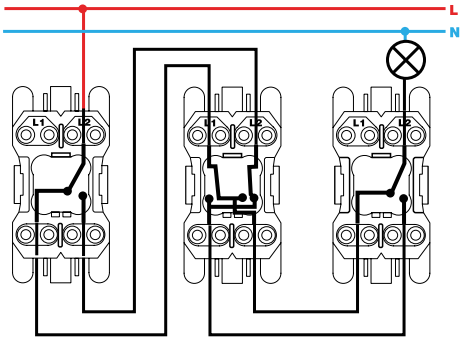


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

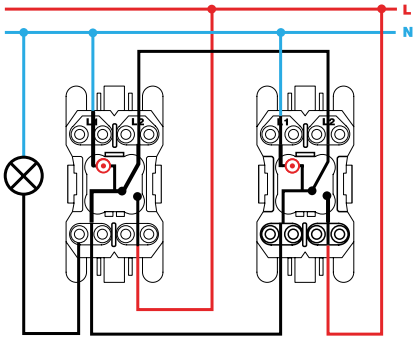


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

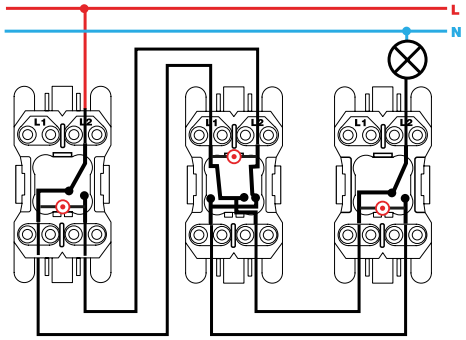

Conmutador cruce / Intermediate switch
XX2700254-XX