


Pull-cord push-button switch 10A 250V~ with fast terminal connection system white Simon 27 Play

REF. 27153-65

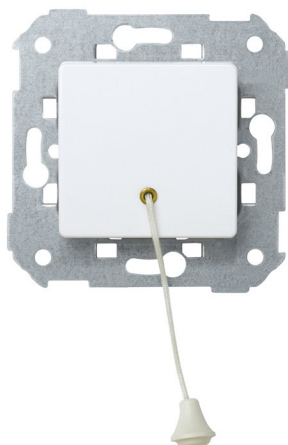

BASIC INFORMATION

DESCRIPTION

The push-button switch handle is ivory in colour, has a current of 10 A and a voltage of 250 V~ of an element and fast-terminal connection system, it belongs to the Simon 27 Play range. It has tilting operation and is suitable for 2 modules, for its installation it will suffice to apply pressure or place on the surface. The wire section admitted is from 1.5 to 2.5 mm and has 11 mm of bare wire. The material is socket metal components with halogen-free thermoplastic insulation and thermoset trim, being able to oscillate between 5 and 40°, and can support up to a maximum of between -25 and 50° C. The dimensions are 45x45 mm, although it is available in other sizes and colors. To keep the piece clean, use a soft and dry cloth, under no circumstances be poured abrasive cloths or cleaners with high chlorine content. Complies with the regulation EN 60669-1: 1999 + A1: 2002 + A2: 2008 + EN 50581: 2040

FINISH

White

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN IEC 61058-1:2018 | EN 61058-2-1:2011 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251652

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.064

PRODUCT NET WEIGHT

0.064

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053081495

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3.017

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.64

PACKAGING NET WEIGHT

0.64

PACKAGING WEIGHT UNIT

KGM