

GFCI circuit breaker with chassis graphite Simon 25 Plus

REF. 25425-38



BASIC INFORMATION

FINISH

Graphite

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

CURRENT (A)

15 A

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

NOMINAL VOLTAGE (V~)

127 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY
(MM)

11

TYPE OF TERMINAL
CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
43

UNITARY PACKAGING WIDTH
74.8

UNITARY PACKAGING LENGTH
113.6

UNITARY PACKAGING
MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.365

UNITARY PACKAGING VOLUME
UNIT
DMQ

UNITARY PACKAGING GROSS
WEIGHT
168.133

PRODUCT NET WEIGHT
134

UNITARY PACKAGING WEIGHT
UNIT
GRM

PACKAGING EAN
7506020301163

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
45

PACKAGING WIDTH
81

PACKAGING LENGTH
118

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
0.43

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.158

PACKAGING NET WEIGHT
134

PACKAGING WEIGHT UNIT
KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO



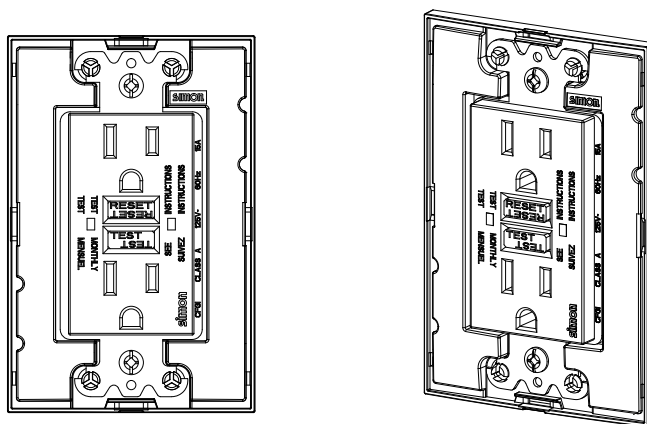


DIAGRAMA DE MONTAJE

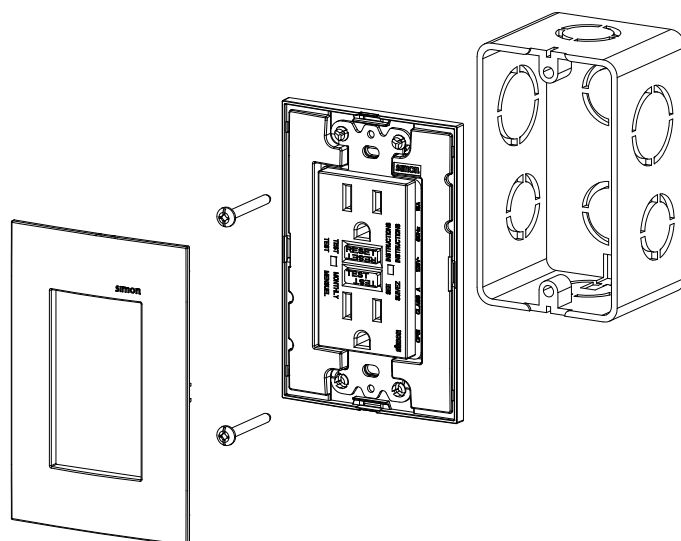

*Placa NO incluida

DIAGRAMA DE CONEXIÓN

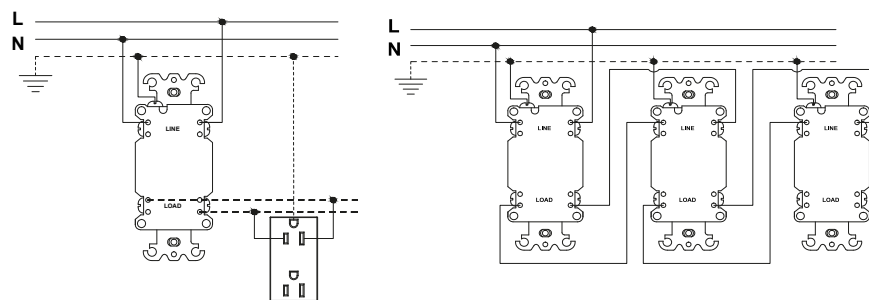

Con otras tomas dúplex.

Con otras tomas dúplex con Interruptor
Contra Fallo a Tierra.