# 2-way switch 10AX 250V~ with built-in light indicator and fast terminal connection system ivory Simon 27 Play

REF. **27204-62**



## BASIC INFORMATION

### DESCRIPTION

The 2-way switch, in the Simon 27 Play Series, with built-in illuminating and in its ivory finish of the series individual, it adapts to several mechanisms of the same Series 27, as well as the series 44. With a current of 10A and a voltage of 250V~ With a quick terminal connection system and a rocker operation, it incorporates a signaling function. With a single element, its dimensions are 45x45mm. The wire section admitted is from 1.5 to 2.5mm and the stripping of wire required is 11mm. It is manufactured with several materials, with metal components with halogen-free insulation and thermoplastic trim, high strength and durability.

### FINISH

Ivory

### COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

### PACKAGING CONTENTS

Mechanism with rocker

### ETIM CLASS

EC001590

### REMARKS

Can be combined with article 2700802-064 if replacing the light indicator.

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

### CONSUMPTION INDICATOR (MA)
0.55 mA

### NUMBER OF POSSIBLE ELEMENTS
1 element

### INDICATOR FUNCTION
Yes

### CURRENT (A)
10 AX

### IP RATING
IP20

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TYPE OF MECHANISM
Pivoting

### NOMINAL VOLTAGE (V~)
250 V~

### OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

### STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

### VERSION
Single

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)
11

### CLAW
Simon 27

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

### INSTALLATION DIRECTION
Horizontal, Vertical

### INSTALLATION TYPE
Suitable for surface and flush mounting

### TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

## REGULATIONS

### REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

## LOGISTICS INFORMATION

UNITARY EAN CODE
8421053251812

UNITARY PACKAGING HEIGHT
45.5

UNITARY PACKAGING WIDTH
38.1

UNITARY PACKAGING LENGTH
45.5

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.079

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.034

PRODUCT NET WEIGHT
0.026

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053035757

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
53

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1.224

PACKAGING VOLUME UNIT
DMQ


PACKAGING GROSS WEIGHT
0.341

PACKAGING NET WEIGHT
0.26


PACKAGING WEIGHT UNIT
KGM

# MECANISMOS SIMON 27, 28 Y 44


## Mecanismos básicos / Basic switches





Interruptor unipolar / Single-pole switch
XX00101-XX





Pulsador / Push button switch
XX00150-XX




Interruptor bipolar / Double pole switch
XX00133-XX





Conmutador / 2-way switch
XX00201-XX

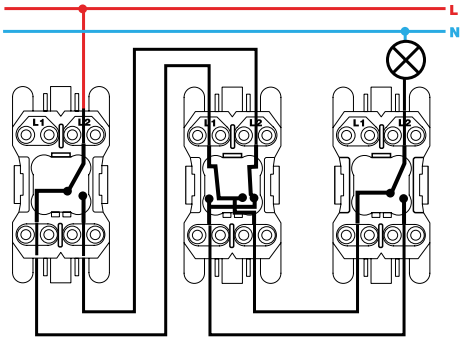



Conmutador cruce / Intermediate switch
XX00251-XX


## Mecanismos con piloto / Pilot switches




Interruptor unipolar / Single-pole switch
XX00102-XX





Interruptor bipolar / Double pole switch
XX00134-XX

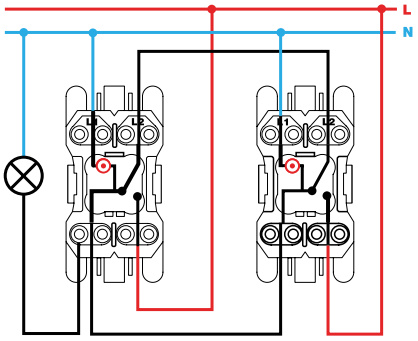



Conmutador / 2-way switch
XX00202-XX


## Mecanismos con luminoso / Switches with light





Interruptor unipolar / Single-pole switch
XX00104-XX




Pulsador / Push button switch
XX00160-XX




Conmutador / 2-way switch
XX2700204-XX

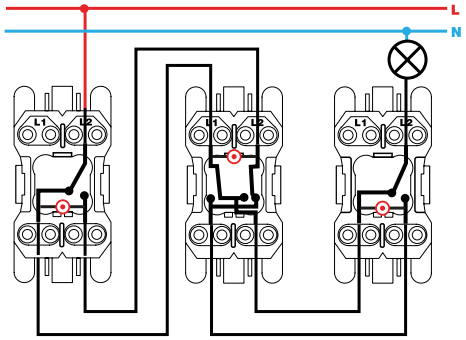


Conmutador cruce / Intermediate switch
XX2700254-XX