

Module Downlight LED Simon 704 2700K Spot Blanco

REF. 70400030-282



BASIC INFORMATION

APPLICATION

Accent lighting, General lighting

ETIM CLASS

EC000996

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

-15 to 35°C

POWER SUPPLY (V~)

220/240 V~

COLOR TEMPERATURE (K)

2700K

CONTROL

On/Off

CRI

80

LIGHT BEAM APERTURE ANGLE (°)

20°

LIGHTING EFFICIENCY (LM/W)

85 lm/W

LUMENS (LM)

1030 lm

LUMENS/W

1030 lm/12W


OPTICS

Spot


SERVICE LIFE

30.000 h


CHROMATICS CRI ICONS



PHOTOMETRY ASSETS – CONICAL

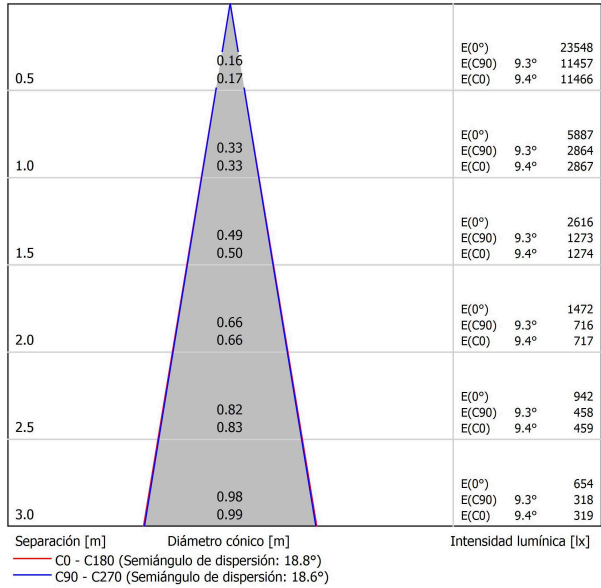

PHOTOMETRY ASSETS – POLAR

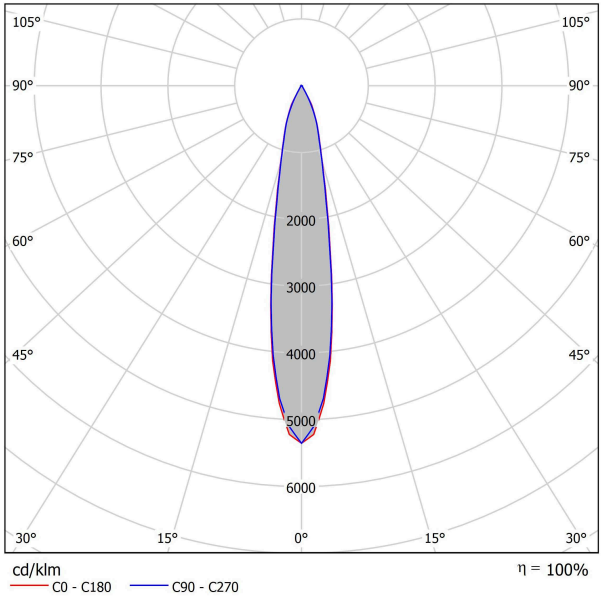

REGULATIONS

WARRANTY

3 years 30.000 h

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053225417

UNITARY PACKAGING HEIGHT

115

UNITARY PACKAGING WIDTH

85

UNITARY PACKAGING LENGTH

118

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

1.037

UNITARY PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING GROSS WEIGHT

0.274

PRODUCT NET WEIGHT

0.23

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053225417

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

115

PACKAGING WIDTH

85

PACKAGING LENGTH

118

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1153450

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.274

PACKAGING NET WEIGHT

0.23

PACKAGING WEIGHT UNIT

KGM