


Timed push button 750 W/VA Simon 75

REF. 75325-39

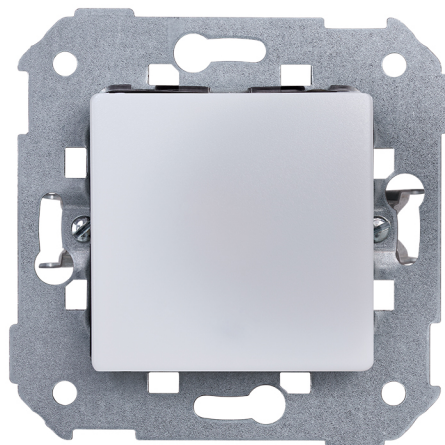

BASIC INFORMATION

DESCRIPTION

Timed push button of 750 W/VA that offers a screw terminal connection system. It features an adjustable timer function ranging from 4 seconds to 10 minutes to adapt to the specific needs of each user. The mechanism can be combined with mechanical auxiliary push buttons. It is suitable for surface mounting and flush mounting, offering a very simple installation that does not require advanced technical knowledge. The push button is equipped with electronic components with thermoplastic halogen-free insulation to ensure the safety of all household members. The mechanism is included in the Simon 75 series and has been manufactured in strict compliance with regulations. The collection combines design, technology, and efficiency, qualities that result in devices with a display that allow for control of various functions related to timing and clocking such as alarm clock, astronomical schedule, programming of shutters, and much more.

MATERIAL

Plastic,Metal

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

No

COMPATIBLE WITH MECHANICAL SWITCH

No

COMPATIBILITY

Marcos Simon 27 Play, Simon 27 Scudo, Simon 27, Simon 31, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)

750 VA

PACKAGING CONTENTS

Push-button timer and instruction sheet

ETIM CLASS

EC000029

COMPATIBLE WITH MECHANICAL PUSH BUTTON

Yes

REMARKS

Allows it to be combined with mechanical auxiliary push buttons.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

ACOUSTIC FUNCTION

No

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)

1.3 W

NUMBER OF CONTACTS

4

NUMBER OF CONTROLLABLE CIRCUITS

1

DISCONNECTION TIMER

4 seconds to 10 minutes

COMPATIBLE WITH HALOGENS WITH ELECTROMAGNETIC TRANSFORMER (W)

750 VA

COMPATIBLE WITH ELECTRONIC AUXILIARY

No

COMPATIBLE WITH HALOGENS WITH ELECTRONIC TRANSFORMER (W)

350 VA

NUMBER OF POSSIBLE ELEMENTS

1 element

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST

No

COMPATIBLE WITH FLUORESCENT LAMPS (VA)

460 VA Non-compensated

FREQUENCY

50 - 60 Hz

INDICATOR FUNCTION

Yes

IP RATING

IP20

LINKABLE

No

COMPATIBLE WITH LOW CONSUMPTION (W)

78 VA

MAXIMUM QUANTITY PER CIRCUIT

1

MONOBLOCK

Yes

COMPATIBLE WITH MOTORS (VA)

3 A

NOMINAL VOLTAGE (V~)

230 V~

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

POWER SUPPLY (V~)

230 V~

RECESS DIMENSION (MM)

40

STORAGE TEMPERATURE RANGE (°C)

-20 - 75 °C

VERSION

Single

VOLTAGE (V~)

230 V~

NUMBER OF WIRES

3

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

10

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush
mounting

CLAW

Included

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REMOVAL OF COVER

Only with tool

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053029299

PRODUCT NET WEIGHT

0.095

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

0.329

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053029299

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.1

UNITARY PACKAGING VOLUME

329232

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

0.095

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.095

PACKAGING LENGTH

76

