


Double USB charger 5V DC 2.1A type A female

REF. 7511096-039

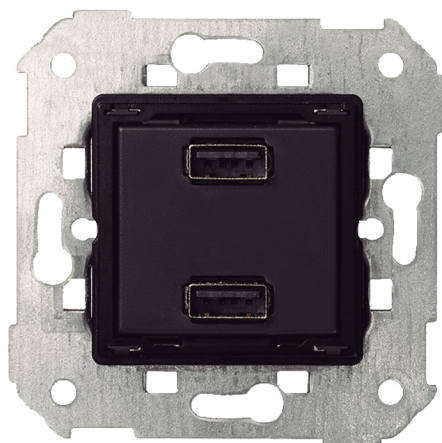

BASIC INFORMATION

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature, Simon 82 and
Simon 88 frames

PACKAGING CONTENTS

Charger and instruction sheet

ETIM CLASS

EC002949

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

No

POWER SUPPLY (V~)

230 V~

CABLE SECTION ADMITTED (MM)

1,5 mm

CURRENT (A)

IP RATING

IP20

STORAGE TEMPERATURE RANGE

(°C)

-20 - 75 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Insertion

USB CURRENT (A)

2,1 A

FORMAT

2 USB A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

CLAW

Optional

INSTALLATION TYPE

Suitable for surface and flush mounting

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053203477

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.09

PRODUCT NET WEIGHT

0.09

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053203477

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

329232

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.098

PACKAGING NET WEIGHT

0.09

PACKAGING WEIGHT UNIT

KGM