


Unipolar switch 10 AX 250V~ with quick terminal connection system Simon 75

REF. 75101-39

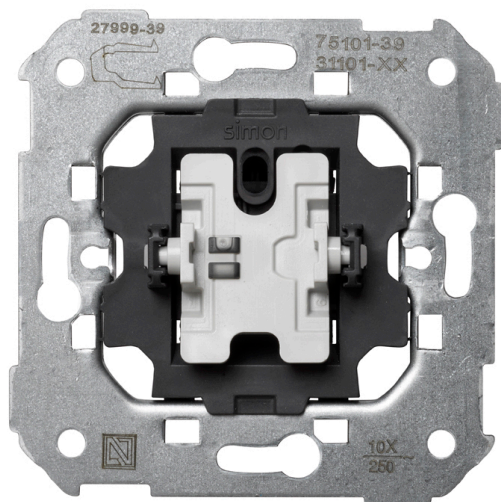

BASIC INFORMATION

DESCRIPTION

1 unipolar switch of 10 AX and 250V~ with quick terminal connection system and rocking operation, compatible and belonging to the Simon 75 brand. It offers the possibility of implementing a signaling function through a signaling support and key with viewer. For installation, it will be sufficient to press or place it on the surface, the accepted cable section is from 1.5 to 2.5 mm and it includes 11 mm of stripped cable. The material is made of metal components with halogen-free thermoplastic insulation, able to oscillate between 5 and 40°, and capable of withstanding a maximum temperature range of -25 to 50° C, this item fully complies with the UNE-EN 60669-1:2002 + A1:2003 + A2:2009 standard.

MATERIAL

Plastic, Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling features with signal support and rocker with viewer.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 40
NUMBER OF CONTACTS 2	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 230 V~	NUMBER OF WIRES 2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2015

LOGISTICS INFORMATION

UNITARY EAN CODE	UNITARY PACKAGING GROSS WEIGHT	PACKAGING LENGTH
8421053255735	0.058	221
UNITARY PACKAGING HEIGHT	PRODUCT NET WEIGHT	PACKAGING MEASUREMENT UNIT
0	0.058	MMT
UNITARY PACKAGING WIDTH	UNITARY PACKAGING WEIGHT UNIT	PACKAGING VOLUME
0	KGM	3026595
UNITARY PACKAGING LENGTH	PACKAGING EAN	PACKAGING VOLUME UNIT
0	8421053003510	MMQ
UNITARY PACKAGING MEASUREMENT UNIT	UNITS CONTAINED PACKAGING	PACKAGING GROSS WEIGHT
MMT	10	0.565
UNITARY PACKAGING VOLUME	PACKAGING HEIGHT	PACKAGING NET WEIGHT
0	83	0.58
UNITARY PACKAGING VOLUME UNIT	PACKAGING WIDTH	PACKAGING WEIGHT UNIT
MMQ	165	KGM

