


Keypad 4 DALI-2 S270 Aluminio

REF. 89000160-093

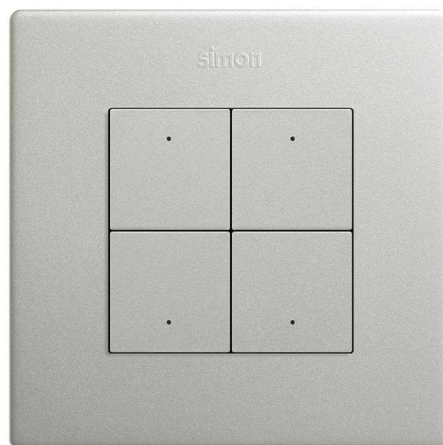

BASIC INFORMATION

DESCRIPTION

DALI-2 four-button keypad. The keypad is powered via the DALI bus, drawing a typical current of 5 mA and a maximum current of 25 mA. It is installed in a flush-mounted box for mechanisms, on a Simon S|270 frame. The keypad is pre-configured to operate without needing to be addressed. Once addressed, it allows configuring the type of press (single, double or long) via the DALI-2 controller. It has an LED indicator on each button. Operating temperature range is 0 – 40 °C and maximum relative humidity is 90%. Dimensions: 49 x 45 x 45 mm. IP 20 protection rating. Aluminium finish.

FINISH

Aluminium

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

TECHNICAL INFORMATION

IP RATING

IP20

POWER SUPPLY (V~)

DALI bus (12 Vdc – 20,5 Vdc)

CONTROL

DALI2

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053323205

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053323205

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0.077

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.051

UNITARY PACKAGING GROSS WEIGHT

0

PACKAGING LENGTH

55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.051