

RJ45 connector IT AMP® category 6 UTP with adapter Simon 100

REF. 10000560-039



BASIC INFORMATION

DESCRIPTION

From the wide range of Simon 100 series products, we are looking for one of the best HDMI V1.4 Type A connectors and one contact. It consists of a female-female connection and insertion system, for its installation. The material with which it was manufactured is a metal plug with thermoplastic insulation, halogen-free. It operates at optimum performance between 5 and 40 ° C, being able to withstand extreme temperatures. The connector complies with all security systems according to current regulations and fulfills its function perfectly because it has the experience of a solid brand specialized in the sector.

FINISH

Black

PACKAGING CONTENTS

HDMI connector

ETIM CLASS

EC000018

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

REVISION
1.4

CONNECTOR TYPE
HDMI

NUMBER OF POSSIBLE
ELEMENTS
1 element

FORMAT
HDMI

IP RATING
IP20

TYPE OF MECHANISM
Insertion

OPERATING TEMPERATURE
RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE
(°C)
-25 - 50 °C

VERSION
Unique

INSTALLATION AND MAINTENANCE

CLAW

INSTALLABLE IN FLUSH MOUNT
JUNCTION BOX
universal

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for flush mounting

TYPE OF TERMINAL
CONNECTION - FUNCTION 1
Female-female

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053145715

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053145715

PACKAGING VOLUME

232375

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

55

PACKAGING GROSS WEIGHT

0.05

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

65

PACKAGING NET WEIGHT

0.05

UNITARY PACKAGING GROSS
WEIGHT

0.05

PACKAGING LENGTH


65

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.05

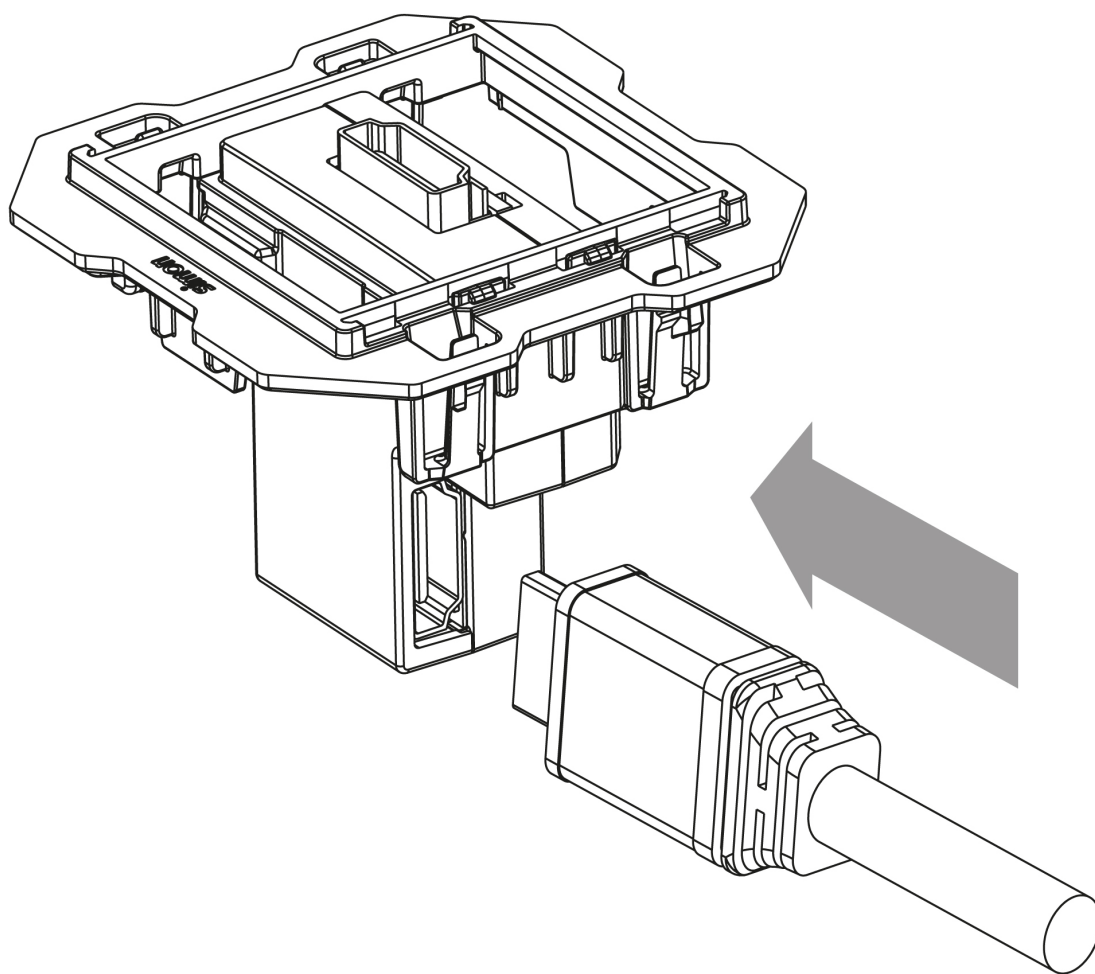

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet