


Group of 2 push buttons 10 A 250V~ (1 input + 2 outputs) with quick terminal connection system Simon 75

REF. 75399-39

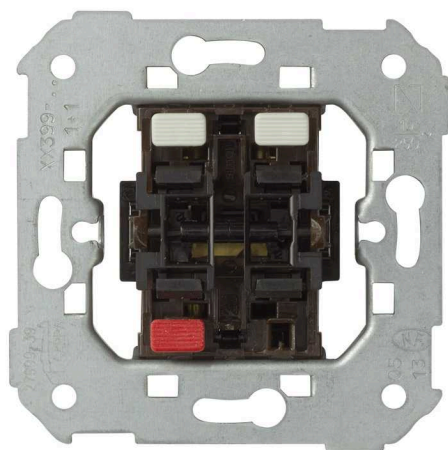

BASIC INFORMATION

DESCRIPTION

Group of 2 push buttons 10 A 250 V~ (1 input + 2 outputs) Simon 75 with quick connection system, designed for the operation of control circuits with a common input and two independent outputs. It allows precise control of lighting and auxiliary systems in residential and professional installations, offering a rated intensity of 10 A at 250 V~ 50 Hz. It incorporates an insertion connection system that facilitates a quick and safe installation, accepting conductors from 1.5 to 2.5 mm² with a strip length of 11 mm. Its tilting operation ensures reliable and durable functioning under frequent use. Made with metallic components and halogen-free thermoplastic insulation, in accordance with EN 60669-1 standards and European directives LVD and RoHS, it ensures safety, resistance, and compatibility with the Simon 75 series and compatible frames.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

REMARKS

Mechanism with one input and two outputs.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 A	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 30
NUMBER OF CONTACTS 3	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Double
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 6

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053256053

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3026595

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.062

PRODUCT NET WEIGHT

0.062

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053029374

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.745

PACKAGING NET WEIGHT

0.62

PACKAGING WEIGHT UNIT

KGM

