
Combined two-pole socket (European/American) 16A 250V~ with ground and screw terminal connection ivory Simon 27 Play

REF. **27439-32**

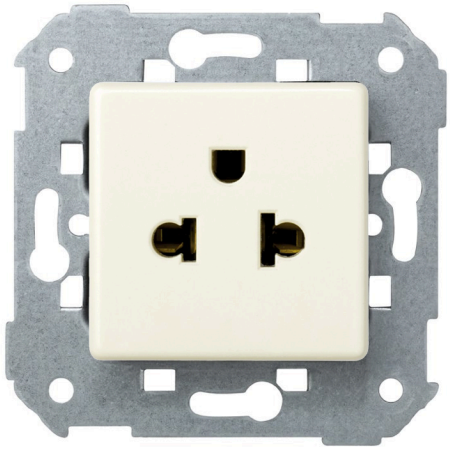

BASIC INFORMATION

DESCRIPTION

In the sockets category of the Simon 27 Play series, we find key mechanisms such as this mixed two-pole socket-outlet (European-American) 16 A 250V~ with ground connection. It is ivory in colour and has dimensions of 45x45 mm, the piece is made up of metal components with halogen-free insulation, providing much more security to individuals. This socket-outlet is suitable for surface and flush mounting and offers a system of screw-terminal connection. Also, it is also valid for replacement or export. The Simon 27 Play collection stands out for its mechanisms focused on the user experience and equipped with all kinds of electronic functions. It is a series that responds to the needs of all households. To maintain this piece, you can use a dry cloth with a soft texture. Avoid abrasive cleaning products containing chlorine.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Socket outlet with cover

ETIM CLASS

EC000125

REMARKS

Suitable for replacement or export.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS

1 element

FORMAT

Two-pole

INDICATOR FUNCTION

No

CURRENT (A)

16 A

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Insertion

MONOBLOCK

No

NOMINAL VOLTAGE (V~)

125/250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

POWER SUPPLY (V~)

125/250 V~

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
10

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS
IEC 60884-1:2006 - Ed.3.1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
33

UNITARY PACKAGING WIDTH
45.5

UNITARY PACKAGING LENGTH
45.5

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.068

UNITARY PACKAGING VOLUME UNIT
DMQ

UNITARY PACKAGING GROSS WEIGHT
0.06

PRODUCT NET WEIGHT
0.04

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
7506020300517

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
50

PACKAGING WIDTH
95

PACKAGING LENGTH
225

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1.069

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.6

PACKAGING NET WEIGHT
0.4

PACKAGING WEIGHT UNIT
KGM