


Dual USB Charger A+C 30W Power Delivery aluminium Simon 270

REF. 20000296-093

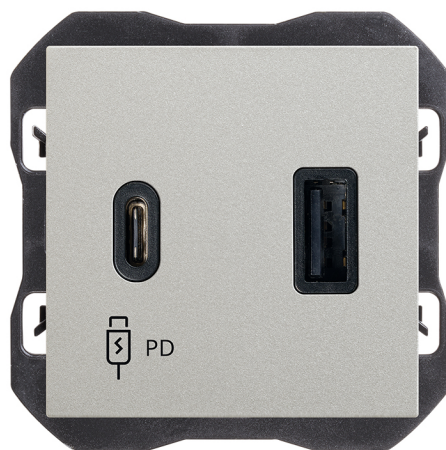

BASIC INFORMATION

FINISH

Matt aluminium

SYMBOL

PD

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Mechanism, cover and
instruction sheet

ETIM CLASS

EC002949

TECHNICAL INFORMATION

AVAILABLE MARKET CE	IP RATING IP20	POWER SUPPLY (V~) 127/230 V~
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	RAL 9006
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Insertion	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
FORMAT USB	MONOBLOCK No	USB PORT TYPE A,C
FREQUENCY 50 - 60 Hz	OPERATING TEMPERATURE RANGE (°C) 5 - 45 °C	VOLTAGE (V~) 127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 7	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for flush mounting
	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053277355

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053277355

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.062

UNITARY PACKAGING GROSS
WEIGHT

0.062

PACKAGING LENGTH

55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.062

