
2-way switch 16AX 250V~ with 1click® terminal connection system

REF. **7700211-039**

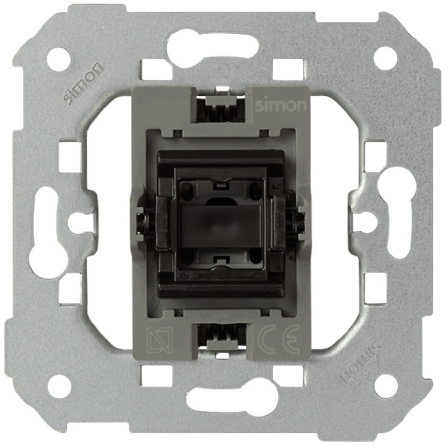

BASIC INFORMATION

DESCRIPTION

It is a 2-way switch 16AX 250V~ with 1click ® terminal connection system. This method of installation is much easier and quicker than others, as you do not need to strip cables, so times are reduced considerably. The 2-way switch is included in the Simon 77 series and is suitable for surface or flush mounting. It has been manufactured from metal components with insulation in halogen-free thermoplastic material in compliance with the legislation. Also, it is an article that resists extreme temperatures very well. However, ideally, it should be installed in environments with a temperature range between 5 and 40ºC. On the other hand, the collection offers the possibility of implementing signaling function via cradle blinking and rocker with viewer. The Simon 77 series is synonymous with innovative mechanisms, which allow you to clamp without stripping or braiding cables, a revolution of the brand.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewe

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
No

CURRENT (A)
16 AX

TYPE OF MECHANISM
Pivoting

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

INSTALLATION AND MAINTENANCE

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
1 click connection (1 click®)

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008 + EN 60998-2-3:2004

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053256497

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.064

PRODUCT NET WEIGHT
0.064

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053080092

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
82

PACKAGING WIDTH
83

PACKAGING LENGTH
223

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1.518

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.32

PACKAGING WEIGHT UNIT
KGM