

Thermostat for electric underfloor heating Simon iO with included probe gloss black Simon 100

REF. 10000811-138



BASIC INFORMATION

FINISH

Gloss black

MATERIAL

Various

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC003263

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONNECTIVITY PROTOCOL

Z-wave

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

FORMAT

Clima

VOLTAGE (V~)

127/230 V~

INDICATOR FUNCTION

No

MONOBLOCK

Yes

INSTALLATION AND MAINTENANCE

CLAW

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION DIRECTION

Vertical

INSTALLATION TYPE

Suitable for recess

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053217474

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053217474

PACKAGING VOLUME

1000125

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

75

PACKAGING GROSS WEIGHT

0.329

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

105

PACKAGING NET WEIGHT

0.25

UNITARY PACKAGING GROSS
WEIGHT

0.329

PACKAGING LENGTH


127

PACKAGING WEIGHT UNIT


KGM

PRODUCT NET WEIGHT


0.25



Instalación centralizada para caldera/bomba de calor
Centralized installation for boiler/heat pump

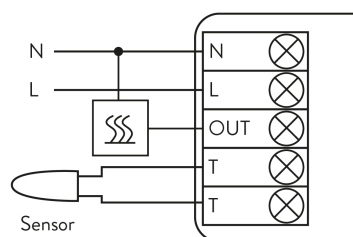

Instalación suelo radiante eléctrico
Installation with electric floor



Instalación zonificada a 230V con contacto Normalmente Abierto
230V installation with Normally Open contact

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet