


Flush-mount wall box for 2 double elements supplied in multiple Simon 500 Cima packaging

REF. 51020702-039

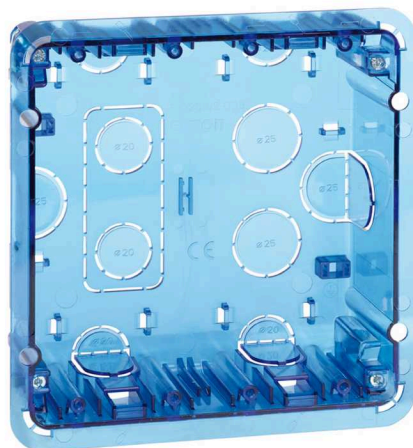

BASIC INFORMATION

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27
Play/Simon K45 mechanisms
using a specific adaptor

PACKAGING CONTENTS

Flush-mount wall box, protective
cover for box and film for
covering the pre-punched items
on the box

ETIM CLASS

EC002601

REMARKS

The flush-mount box can be used as a template during installation thanks to the guides for marking the perimeter of the box

TECHNICAL INFORMATION

AVAILABLE MARKET CE

AVAILABLE IN

1, 2, 3, 4 and 6 double elements

NUMBER OF CLAMP-HOLDER HOLES

10

DIELECTRIC STRENGTH

No holes or contours, with 2000V
at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING

Secured by installing the metal
partition wall in the housing
fitted into the box for this
purpose.

NUMBER OF ENCLOSURES FOR GROUND CONNECTION

2

HEAT RESISTANCE (°C)

+125°C (according rule IEC
60695-10-2)

IK CLASSIFICATION

07

INSULATION RESISTANCE (V-MΩ)

>5MΩ at 500V

IP RATING

IP4X

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do
not use abrasive cloths or
cleaning products that contain
chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

4

NUMBER OF PRE-PUNCHED HOLES 30 X 70 MM

1

RECESS DIMENSION (MM)

135 x 141 mm

NUMBER OF SIDE ENTRANCES

2

VERSION

2 double elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)

Between 4 and 30 mm

REMOVAL OF COMPONENTS

Only with tool

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in
accordance with standard IEC
60695-2-11)

TYPE OF FASTENING

Using the claws included in the
enclosure, in combination with
aggregates, binders, additives,
etc.

INSTALLATION DIRECTION

Vertical, corresponding with the
direction of the mechanisms

INSTALLATION TYPE

Suitable for flush mounting on
the wall

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053114094

PACKAGING VOLUME

0.173

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

HLT

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

260

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS WEIGHT

1.663

PACKAGING WIDTH

222

PACKAGING NET WEIGHT

16.63

PRODUCT NET WEIGHT


1.663

PACKAGING LENGTH


300

PACKAGING WEIGHT UNIT


KGM

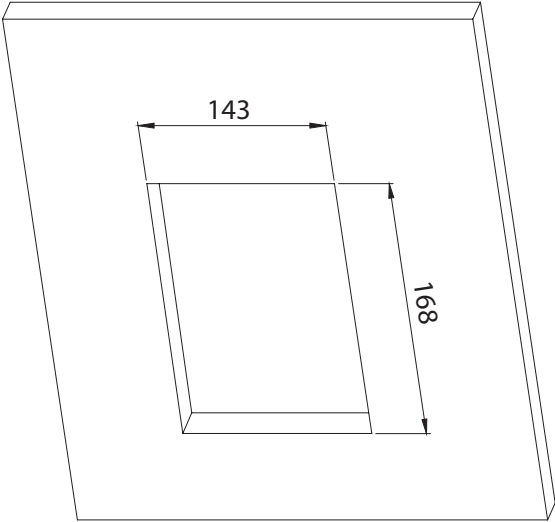

•Grosor pared de 4 a 30mm



Tabique obra



Tabique hueco

