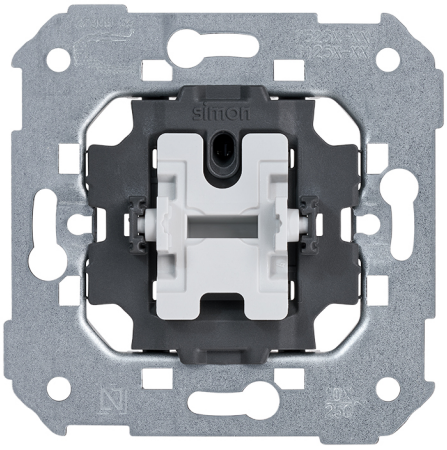
Intermediate switch 10 AX 250V~ with quick terminal connection Simon 75

REF. **75251-39**



BASIC INFORMATION

DESCRIPTION

The Intermediate Switch 10 AX 250V~ with quick terminal connection system from the Simon 75 series is one of the safest mechanisms currently available on the market. This quality has made it one of the best sellers in the sector, along with a very functional design that enhances the possibilities of electrical systems in various rooms in homes or businesses where it is installed. It has the option to implement signaling function through a signal holder and key with viewer. Suitable for surface and flush mounting with a cable section of 1.5 to 2.5 mm and cable stripping of 11 mm.

Its design supports a temperature range of -25° to 50° C thanks to the metal components with halogen-free thermoplastic insulation with which it has been made. This mechanism is valid for the Simon 75 and 82 series.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONTACTS
4

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY
50 Hz

INDICATOR FUNCTION
No

CURRENT (A)
10 AX

IP RATING
IP21

LINKABLE
No

TYPE OF MECHANISM
Pivoting

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
40

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
4

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
15

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053255926

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.061

PRODUCT NET WEIGHT
0.061

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053003664

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
83

PACKAGING WIDTH
165

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

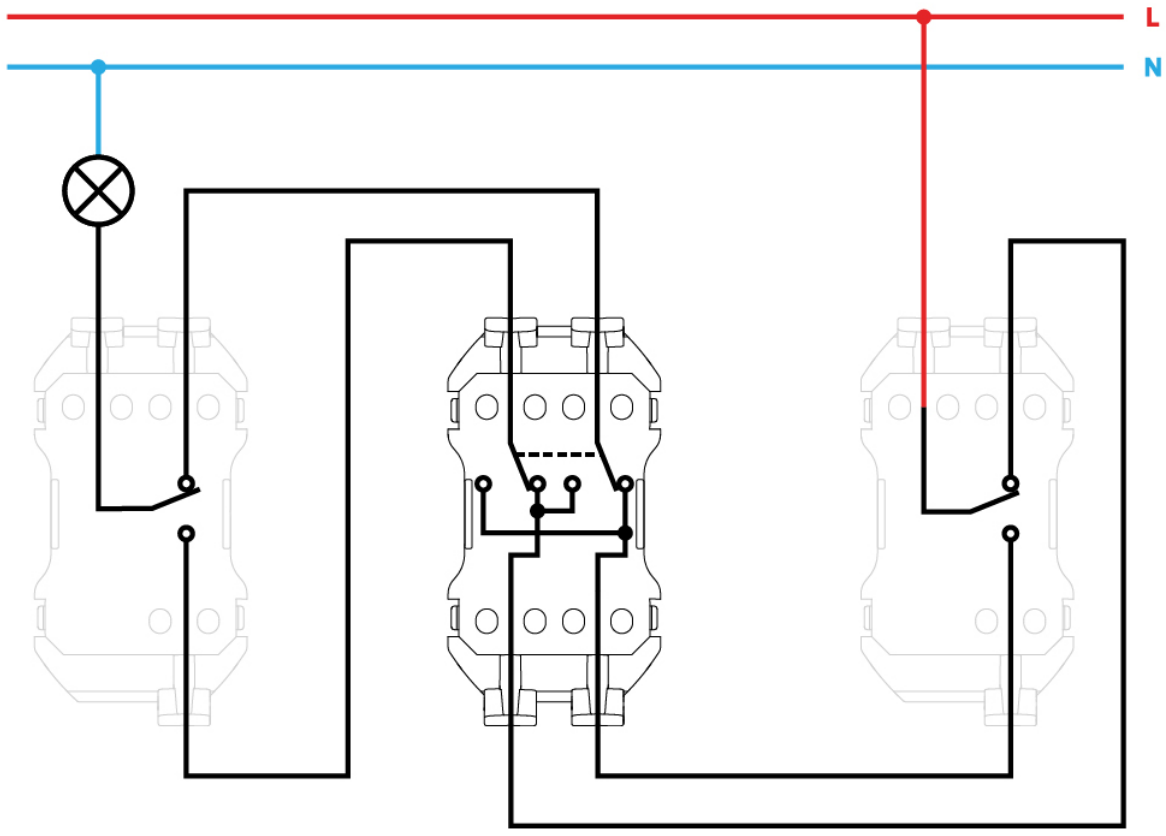
PACKAGING VOLUME
3026595

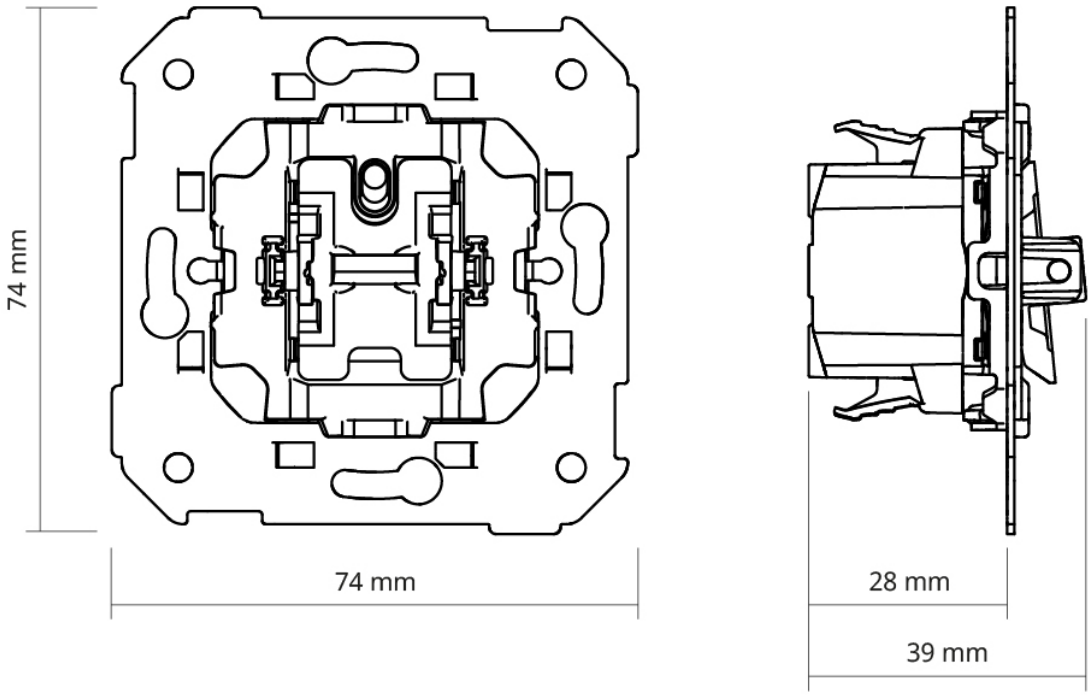
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.625

PACKAGING NET WEIGHT
0.61

PACKAGING WEIGHT UNIT
KGM


L
N


74 mm
74 mm
28 mm
39 mm