
Voice and data flat plate without dust cover for 1 element for 2 Panduit® RJ45 connectors black Simon K45

REF. **KB069/14**

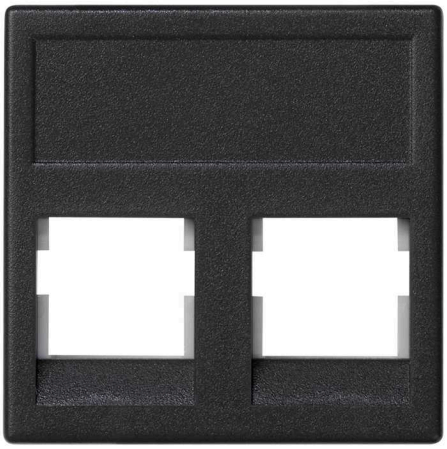

BASIC INFORMATION

DESCRIPTION

Innovation and functionality in its work area with the plate of voice and data plate without dust cover with 1 element and 2 RJ45 Panduit, within the collection Simon K45. With the delicacy of avant-garde finishes in black, the plate of voice and data K45 gives a jump of quality thanks to the connection with Panduit and its RJ45 connector to ensure the excellence in their connections. With installation of direct snap-fit, you can prepare both in surface-mounted and recessed, without the need to use screws, minimising the time of installation and maximizing its functionality. Also, within the range K45, you can combine the flat base plate with the 90 ° positioner (ref.K66) to guide the plate and adapt it to vertical enclosures type columns, Teleblock, channels mechanism-holders. Manufactured with metal materials isolated with halogen-free thermoplastic, prevent the propagation of the flame and the toxicity smoke in case of fire. Security, innovation and functionality in the Simon K45 range.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

COMPATIBLE WITH CONNECTORS
Panduit® Mini-Com Series.

RJ45 CONNECTORS
Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

DUST PROTECTION
No

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Half

PLATE TYPE
Flat

RAL
7021

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
Panduit® RJ45 connectors

SNAP-FIT TYPE
Panduit® RJ45 connectors

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
45570

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.012

PRODUCT NET WEIGHT
0.012

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436037298

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
70

PACKAGING WIDTH
93

PACKAGING LENGTH
140

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
911400

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.24

PACKAGING NET WEIGHT
0.24

PACKAGING WEIGHT UNIT
KGM