Metal mini tower kit with 3 heights and 1 side with 1 double socket, 1 dual UPS and 2 plates for 1 RJ45 graphite Simon 500 Cima

REF. **52516302-036**



BASIC INFORMATION

DESCRIPTION

This complete kit is part of the Simon 500 Cima range, and comes in an innovative graphite colour that endow of modernity and, at the same time, elegance to the room of the home, premises or office is placed. The kit consists of a metal mini-tower with 3 heights with a side with capacity to provide energy to elements of up to 16 A and 250 volts. Its measures are 235,5 x 221 millimetres and 68 millimetres of depth. In addition to the mini-tower, the package includes a double socket, 2 plates for 1 1RJ45 and an uninterruptable power supply system double UPS. This system allows the operation of the mini-tower for a limited time even if there is a power outage. The product can be installed easily and allows you to do it in any type of floor, be it in concrete or raised floor, making it very versatile. The centre of the mini-tower include linkable parts that make blocks, allowing separation of the electrical part from the voice and data part for easier maintenance. It is a product made in stainless steel, so that has great resistance and extra hardness, which increases its safety and extends its service life.

FINISH

Metal

MATERIAL

Stainless steel

PACKAGING CONTENTS

Configured mini tower, metal partition wall, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The frame holders include linkable parts that form blocks, allowing the electrical part to be separated from the voice and data part for ease of maintenance

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 side

NUMBER OF CONNECTIONS PER TERMINAL
1 terminal connection for click terminal connection system and 2 terminal connections for screw terminal connection system

COMPATIBLE WITH CONNECTORS
Simon©, AMP netconnect© Standard 110, SL110, SL Tool-less, 216000 and 216005, Brand-Rex©, ADC Krone© KM8 Keystone, BeldenCDT© Giga Flex Keystone, Ersys©, General Cable©, Molex©, Panduit© Netkey, Ortronics© Clarity TechChoice Keystone, Rit© and other manufacturers with Keystone snap-fit system.

NUMBER OF CONNECTORS
2

RJ45 CONNECTORS
Not included

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST SHUTTER
Yes

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

FORMAT
Schuko

IK CLASSIFICATION
08

INDICATOR FUNCTION
Yes

CURRENT (A)
16 A

IP RATING
IP4X

LED CONSUMPTION INDICATOR (MA)
0.55

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 120° C

TYPE OF MECHANISM
Insertion

NUMBER OF MODULES
6

NUMBER OF PLATES
2 voice and data plates

PLATE TYPE
Flat

RJ45 ADAPTOR MODULE
Included in voice and data plates

SNAP-FIT RJ45 PLATES
Keystone I, Keystone II and Systimax

SNAP-FIT TYPE
Keystone I, Keystone II and Systimax

NUMBER OF SOCKETS
1 double socket for standard current circuit and 1 double socket for stable current circuit

VERSION
1 side

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
Using the screws supplied

REMOVAL OF THE FRAME
Only with tool

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

REMOVAL OF THE PLATE
Only with tool

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
1 click connection (1 click®)

NUMBER OF TERMINALS
3 inputs and 3 outputs

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50085-2-4:2009 + EN 50173-1:2011 + EN 50581:2012 + IEC 60884-1 Ed 3.2

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053100783

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.855

PRODUCT NET WEIGHT
1.855

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053100783

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
67

PACKAGING WIDTH
168

PACKAGING LENGTH
272

PACKAGING MEASUREMENT UNIT
MMT

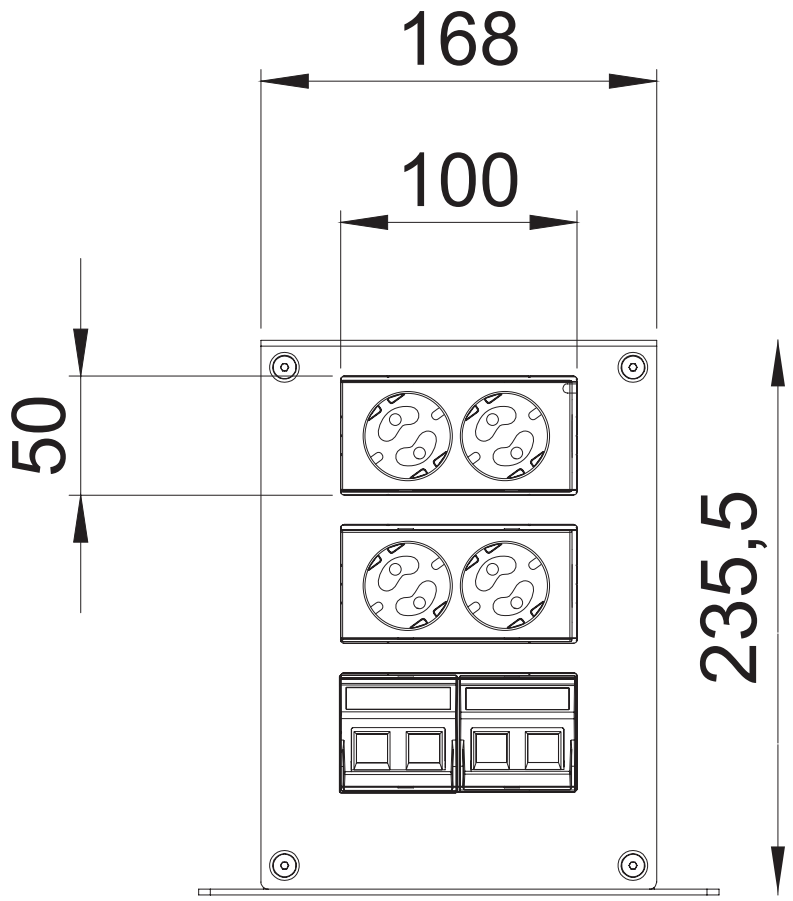
PACKAGING VOLUME
3.062

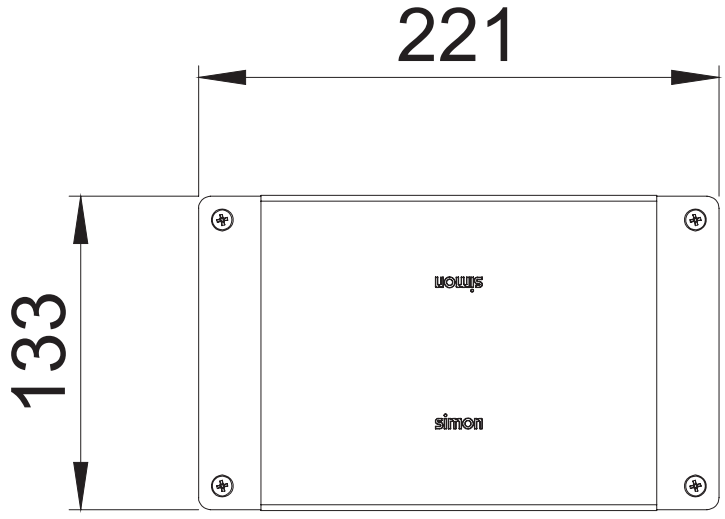
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.855

PACKAGING WEIGHT UNIT
KGM


168
100
50
235,5


221
133
simon
simon