


Switch for card 5 A 250V~ with light indicator and
adjustable timing between 0 seconds and 10 minutes
Simon 75

REF. 75558-39

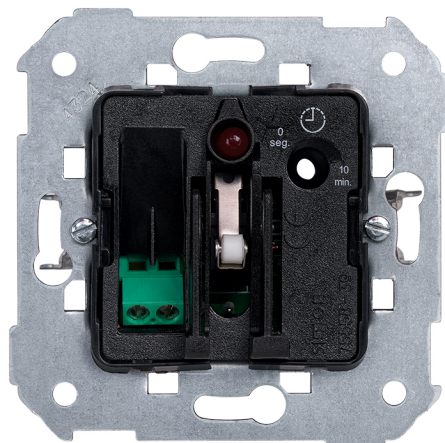

BASIC INFORMATION

DESCRIPTION

Switch for card 5 A 250 V~ Simon 75 with light indicator and adjustable timing between 0 seconds and 10 minutes, designed to optimize energy control in hotels, apartments, and professional spaces. An efficient solution that combines functionality and design in a single mechanism. The adjustable timing allows adapting the disconnection time to each project, promoting energy savings and improving the management of lighting and other associated circuits. The integrated light indicator facilitates location and provides an intuitive user experience. Compatible with multiple Simon series, it visually integrates into any environment, maintaining a clean, safe installation that meets current technical requirements.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 27 Play, Simon 27 Scudo, Simon 27, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82.

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC001590

REMARKS

It is recommended to protect the faston connectors with heat shrink tubing and connect with a power relay.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,0 to 1,5 mm

CONSUMPTION INDICATOR (mA)

1 mA

NUMBER OF CONTACTS

5

DISCONNECTION TIMER

0 seconds to 10 minutes

COMPATIBLE WITH ELECTRONIC AUXILIARY

No

NUMBER OF POSSIBLE ELEMENTS

1 element

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST

No

FREQUENCY

50 Hz

INDICATOR FUNCTION

Yes

CURRENT (A)

5 A

IP RATING

IP20

LINKABLE

No

TYPE OF MECHANISM

Card

MONOBLOCK

No

NOMINAL VOLTAGE (V~)

230 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

RECESS DIMENSION (MM)

40

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VOLTAGE (V~)

230 V~

NUMBER OF WIRES

5

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

10

CLAW

Included

REMOVAL OF COVER

Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

KIT INSTALLATION DIRECTION

Vertical and horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN IEC 61058-1:2018 | EN 61058-1-1:2016 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053058381

PRODUCT NET WEIGHT

0.09

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

329232

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053058381

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

329232

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

0.09

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.09

PACKAGING LENGTH

76

