Service cover for 8 elements for installation in concrete floor or raised floor graphite Simon 500 Cima

REF. **52054104-038**



BASIC INFORMATION

DESCRIPTION

Elegance and sophistication with the Service cover of 8 elements for installation in concrete floor or raised floor within the collection Simon 500 Cima. With delicate finishes in Graphite, this service cover integrates seamlessly into the space and fitting into any type of room, thanks to its simple and minimalist finishes. Made of halogen-free thermoplastic, it guarantees the security necessary in case of fire to encourage the no flame propagation or toxicity by smoke. It is also perfectly compatible with voice and data connectors and separates constantly the electrical cabling and Multimedia, preventing electromagnetic interference and transmission errors. One of the features of the service cover Simon 500 Cima, is the new being configurable according to the needs of each space. Once again, the Simon 500 Cima collection combines innovation, design and functionality in a single product.

FINISH

Graphite

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

MATERIAL

Plastic

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053104-038) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
8 modules

RAL
7021

RECESS DIMENSION (MM)
170 x 265 mm

VERSION
8 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica y metálica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053101650

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.19

PRODUCT NET WEIGHT
1.19

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101650

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
75

PACKAGING WIDTH
186

PACKAGING LENGTH
282

PACKAGING MEASUREMENT UNIT
MMT

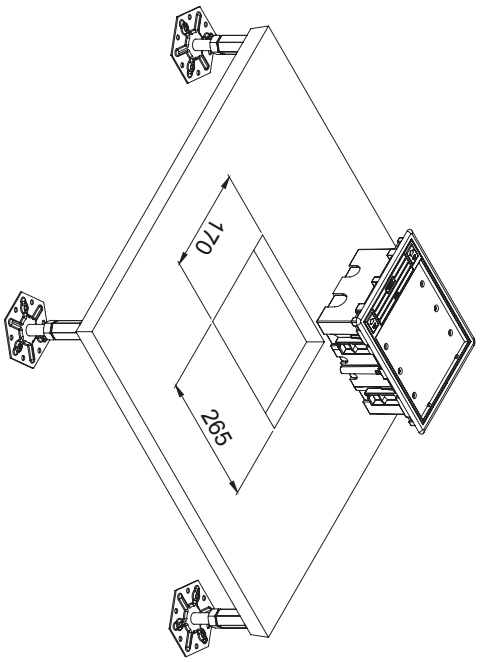
PACKAGING VOLUME
3.934

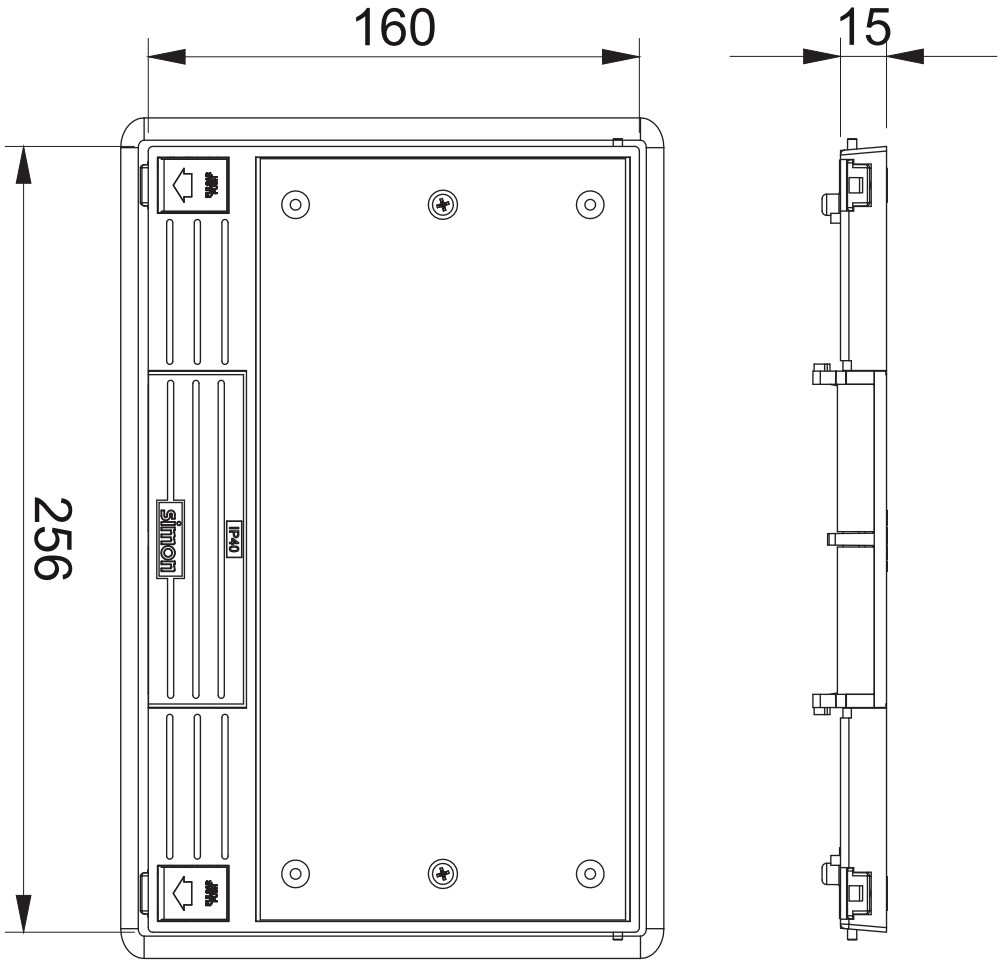
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.19

PACKAGING WEIGHT UNIT
KGM


170
265


160
15
256
simon
IP40