


2-way switch for card with 1 micro switch and light indicator 250V~

REF. 26526-39

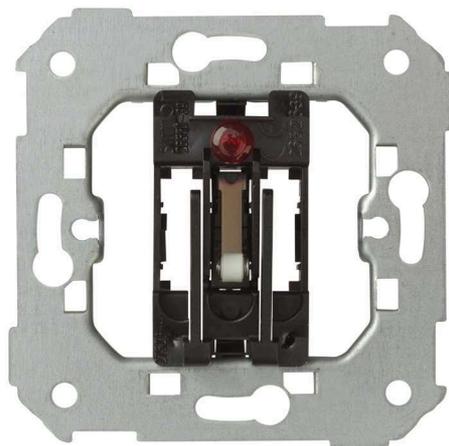

BASIC INFORMATION

DESCRIPTION

Simon 82 linking design and maximum functionality in its range of 2-way switches for card with a design of stylish and simple lines, guarantees the major innovation and security. This 2-way switch for card with indicator light, includes 1 microswitch and accepts power of 250 Volt voltage and an intensity of 6 Amps. Its installation, suitable for recessed or surface-mounted, you need to associating the article to a relay because, is not the case, the maximum current is 6 A (2 A inductive). To complete the installation requires welding, with a cross-cable section cross-section of 0.5 mm It is made of metal materials with halogen-free thermoplastic isolated that prevent the flame spread and toxicity by smoke in case of fire. It can reach maximum temperatures of -25 and 75 °C. The collection of 2-way switches for card of Simon 82, maximize the functionalities minimising the space.

COMPATIBILITY

Simon 27 Play, Simon 27 Neos,
Simon 27 Scudo, Simon 27,
Simon 44 Aqua, Simon 75, Simon
82 Detail, Simon 82 Nature and
Simon 82 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

A contactor must be installed at the output of the mechanism. If this is not done, the maximum current of the switch is 10 A resistive (1.5 A inductive). It is recommended to protect the faston connectors with a heat shrink sleeve.

TECHNICAL INFORMATION

| | | |
|---|--|--|
| CABLE SECTION ADMITTED (MM) 0,5 mm | IP RATING IP20 | POWER SUPPLY (V~) 250 V~ |
| NUMBER OF POSSIBLE ELEMENTS 1 element | MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine. | STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C |
| FREQUENCY (HZ) 50 Hz | TYPE OF MECHANISM Card | VERSION Single |
| INDICATOR FUNCTION Yes | OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C | VOLTAGE (V~) 250 V~ |
| CURRENT (A) 10 (1,5 ind.) A | | |

INSTALLATION AND MAINTENANCE

| | | |
|---|---|--|
| CLAW Simon 27 | INSTALLATION DIRECTION Vertical and horizontal | KIT INSTALLATION DIRECTION Vertical and horizontal |
| INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal | INSTALLATION TYPE Suitable for surface and flush mounting | TYPE OF TERMINAL CONNECTION - FUNCTION 1 Faston |

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN IEC 61058-1:2018 | EN 61058-1-1:2016 | EN IEC 63000:2018

LOGISTICS INFORMATION

| | | |
|---|--|-----------------------------------|
| UNITARY EAN CODE 8421053250082 | UNITARY PACKAGING GROSS WEIGHT 0.05 | PACKAGING LENGTH 223 |
| UNITARY PACKAGING HEIGHT 0 | PRODUCT NET WEIGHT 0.05 | PACKAGING MEASUREMENT UNIT MMT |
| UNITARY PACKAGING WIDTH 0 | UNITARY PACKAGING WEIGHT UNIT KGM | PACKAGING VOLUME 3017190 |
| UNITARY PACKAGING LENGTH 0 | PACKAGING EAN 8421053024416 | PACKAGING VOLUME UNIT MMQ |
| UNITARY PACKAGING MEASUREMENT UNIT MMT | UNITS CONTAINED PACKAGING 10 | PACKAGING GROSS WEIGHT 0.5 |
| UNITARY PACKAGING VOLUME 3017190 | PACKAGING HEIGHT 82 | PACKAGING NET WEIGHT 0.5 |
| UNITARY PACKAGING VOLUME UNIT MMQ | PACKAGING WIDTH 165 | PACKAGING WEIGHT UNIT KGM |