


Angled voice and data plate with dust cover for 1 element with 1 RJ45 category 6 FTP aluminium Simon 500 Cima

REF. 50003081-033

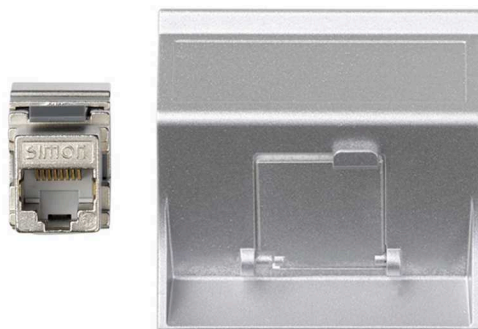

BASIC INFORMATION

DESCRIPTION

Plate of voice and data plate of the Simon 500 Cima series. This plate is available in a stylish finished in aluminium. It has a dust shutter and is an element, for an RJ45 connector, category 6 FTP. Its snap-fit is performed by Keystone I, II, ATT, Avaya. This is the individual version of a module. To set it in horizontal or vertical enclosures are included the clips required. So that you have to use any type of adaptor external. The dimensions of the product are 50 x 50 x 55,4 millimetres. Thanks to the metal components, asylum seekers thermoplastically, and halogen-free that are used in its manufacture, the plate Simon can withstand extreme temperatures very, reaching maximum temperatures of 60 degrees centigrade. This power the versatility of the product. For its maintenance, it is sufficient to use a dry and soft cloth that does not contain abrasive cleaning products that have chlorine or other chemical.

FINISH

Aluminium

PACKAGING CONTENTS

Angled voice and data plate with dust cover, RJ45 category 6 FTP connector and installation manual

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST PROTECTION

Yes

PLATE TYPE

Angled

CABLE SECTION ADMITTED (MM)

22-26 AWG wiring

FORMAT

RJ45

RJ45 ADAPTOR MODULE

Included in voice and data plate

RJ45 CONNECTION

Without insertion tool

IP RATING

IP20

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

CONNECTOR CHARACTERISTICS

category 6 FTP

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

NUMBER OF CONNECTORS

1

VERSION

Single

RJ45 CONNECTORS

Included in voice and data plate

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

NUMBER OF MODULES

1

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

80

UNITARY PACKAGING WIDTH

224

UNITARY PACKAGING LENGTH

290

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

5196800

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.08

PRODUCT NET WEIGHT

0.08

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053097786

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

80

PACKAGING WIDTH

224

PACKAGING LENGTH

290

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.052

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

1.6

PACKAGING WEIGHT UNIT

KGM

