# ARCH Downlight Trimless Round 4000 K Flood Black

REF. **91563002-488**




## BASIC INFORMATION

| FINISH | APPLICATION | PACKAGING DIMENSIONS (MM) |
|---|---|---|
| Black | Domestic,Office,Retail,Hotel,Contract | 116x224x171 mm |
| **BODY MATERIAL** | **PACKAGING CONTENTS** | **ETIM CLASS** |
| Die-cast aluminium | 1 Unit | EC001744 |

# TECHNICAL INFORMATION

**FREQUENCY**
50 - 60 Hz

**IP RATING**
IP20

**OPERATING TEMPERATURE RANGE (°C)**
0 - 35 °C

**POWER SUPPLY (V~)**
110/240 V~

**RAL**
9005

**COLOR TEMPERATURE (K)**
4000 K

**CRI**
80

**DIRECTIONAL**
Yes

**DRIVER INCLUDED**
No

**ELECTRICAL CLASS**
II

**ENERGY EFFICIENCY**
A+

**L70 (°C)**
100000h at 25°C

**L90 (°C)**
30000h at 25°C

**COLOR TYPE**
CW

**LIGHTING EFFICIENCY (LM/W)**
111 lm/W

**LUMENS (LM)**
900 lm

**NUMBER OF LUMINAIRES**
1

**MACADAM STEPS**
<3 Step MacAdam


**OPTICS**
Flood 36°

**PHOTOBIOLOGICAL CLASSIFICATION**
Class II

**POWER FACTOR (Φ)**
> 0,9

**POWER (W)**
9 W

## PHOTOMETRY ASSETS – POLAR

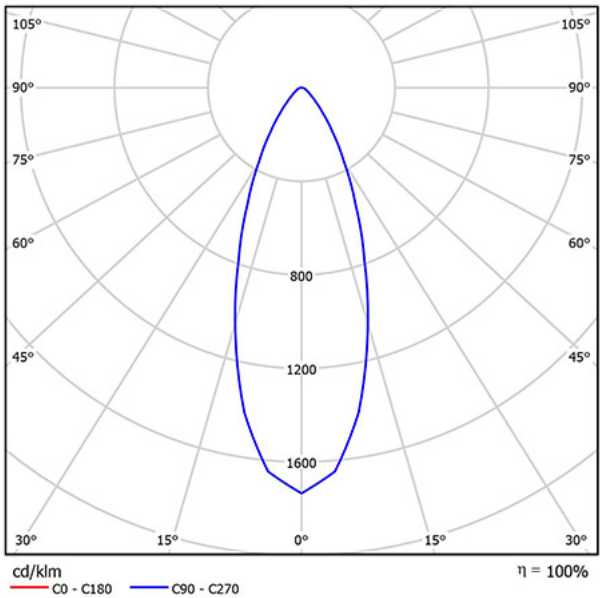

## INSTALLATION AND MAINTENANCE

### INSTALLATION ALTERNATIVES

Flush-mounted, Surface-mounted

### INSTALLATION TYPE

Trimless

## REGULATIONS

### EAC MARKED

Yes

### ECORRAE MARKED

No

### WARRANTY

5 years

## LOGISTICS INFORMATION

UNITARY EAN CODE
8436547036004

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.9

PRODUCT NET WEIGHT
0.719

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8436547036004

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
116

PACKAGING WIDTH
171

PACKAGING LENGTH
224

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
4528125

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.99

PACKAGING NET WEIGHT
0.719

PACKAGING WEIGHT UNIT
KGM