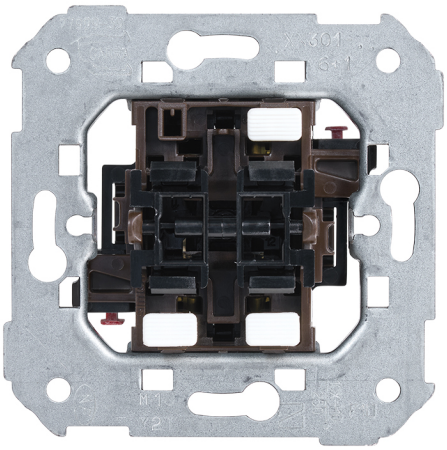
Group with 1 two-way switch 10 AX 250V~ and 1 push button 10 A 250V~ with quick terminal connection Simon 75

REF. **75301-39**



BASIC INFORMATION

DESCRIPTION

Providing an accurate response to the new market demands is one of the objectives of all the people working at Simon. With this goal in mind, the Group of a 10 AX 250V~ two-way switch and a 10 A 250V~ push button with a quick terminal connection system from the Simon 75 series has been created. Its easy and quick installation is one of its attractions, being suitable for surface and flush mounting. It is a mechanism valid for Simon 75 and 82 series, and its installation should be carried out in a universal socket base vil544. It is designed to withstand extreme environmental conditions thanks to the metallic components made with halogen-free thermoplastic insulation. Its technical characteristics are complemented by a wire section of 0.2 to 0.5 mm and a wire stripping length of 11 mm. Maximum quality at the best price.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC002846

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
1.5 - 2.5

NUMBER OF CONTACTS
5

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY
50 Hz

INDICATOR FUNCTION
No

CURRENT (A)
10 AX + 10 A

IP RATING
IP20

LINKABLE
No

TYPE OF MECHANISM
Pivoting

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
30

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
5

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
15

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053255957

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
3026595

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.066

PRODUCT NET WEIGHT
0.066

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053003688

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
83

PACKAGING WIDTH
165

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

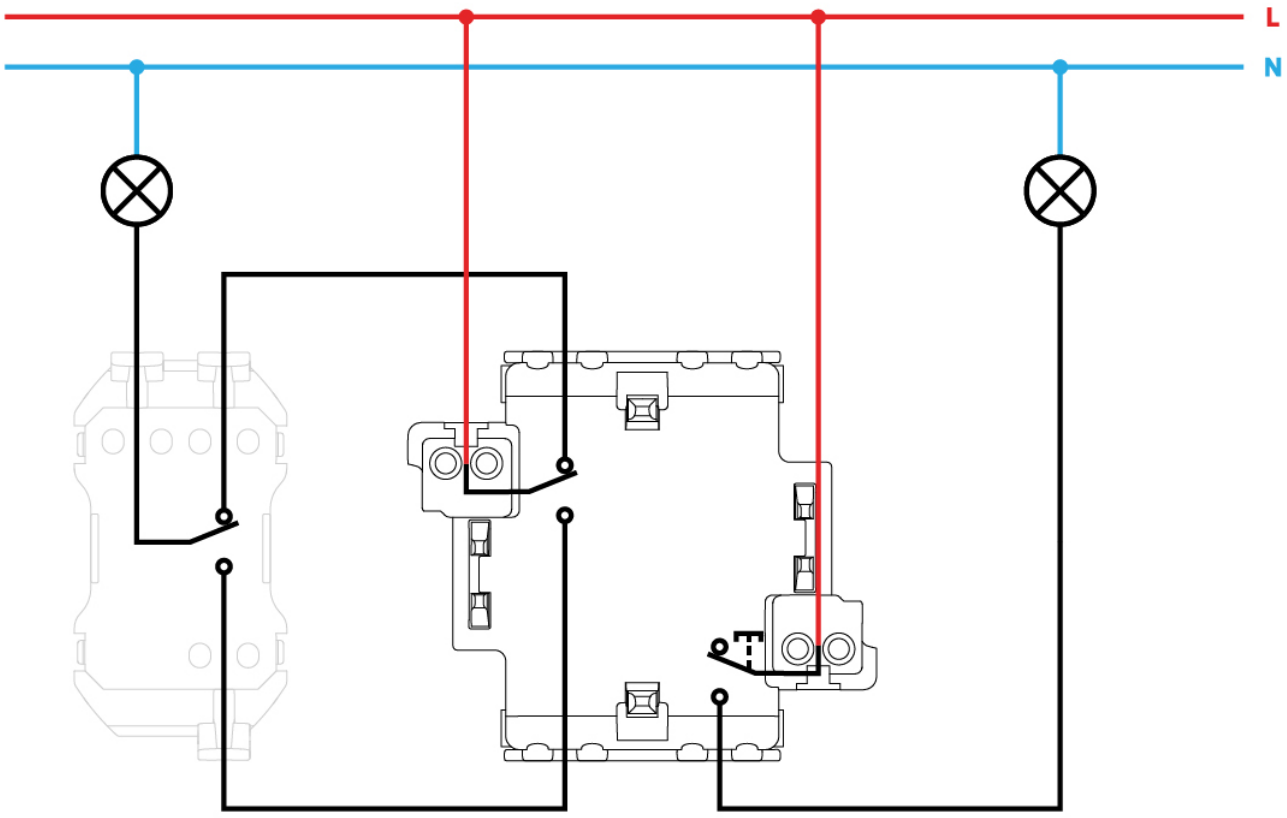
PACKAGING VOLUME
3026595

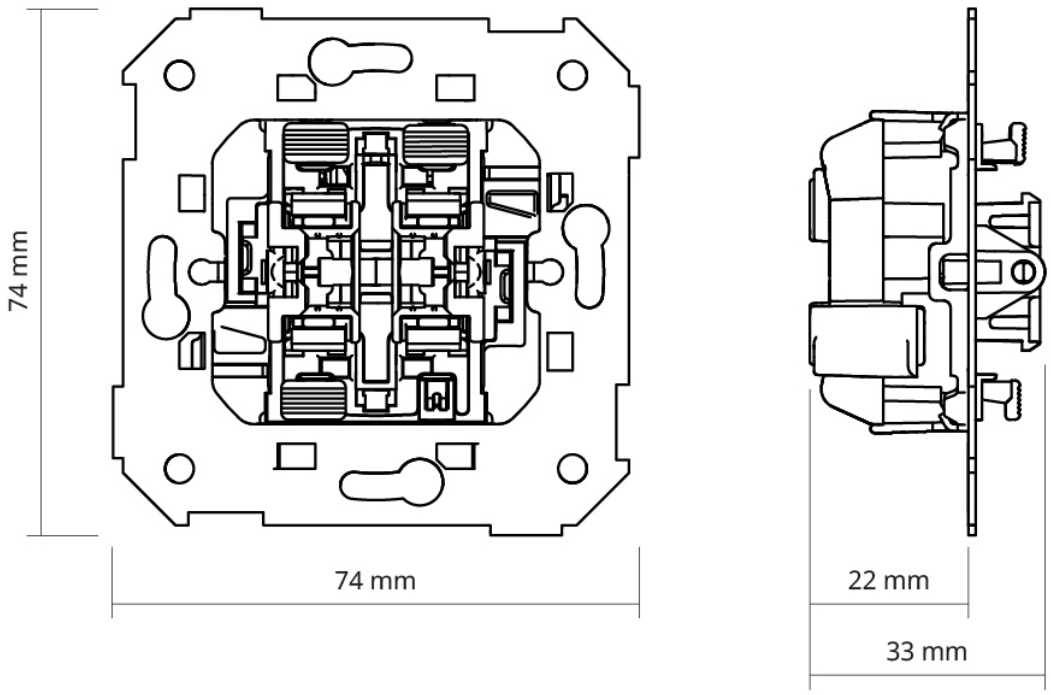
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.75

PACKAGING NET WEIGHT
0.66

PACKAGING WEIGHT UNIT
KGM


L
N


74 mm
74 mm
22 mm
33 mm