Complete kit with dual opening cover, brushes and 12 schuko socket outlets white S400 Indesk Duo

REF. **46606000-130**



BASIC INFORMATION

DESCRIPTION

Avoid the flame spread in case of fire and the low toxicity in case of smoke in the electrical installations of homes and commercial premises is possible thanks to the kit is part of the table complete with cover with two opening, brushes and twelve socket-outlets plug in white colour of the series Simon 400 Indesk Duo. Suitable to be flush mounted in furniture, it has a connector figure Wieland ® gst18i with 3 poles male in-line with patch cord of 22 cm, with a current of 16 A and a voltage of 250 V ~. To complete the installation of the product, Simon recommended to be combined with the functions of the range 400. This product has has a insulation resistance > 5 M? at 500 V and dielectric strength with no holes or contours with 2000 V at 50H during 1 minute. Its structure has been made with enclosure painted steel, profile in anodised aluminium, covers and fastenings in self-extinguishing thermoplastic and halogen-free.

FINISH

White

MATERIAL

Metal

COMPATIBILITY

Can be combined with the range of Electric Cabling from Simon.

PACKAGING CONTENTS

Pre-wired profiles, enclosure, fastening claws, 3-pole T-branching with 1 male input and 2 female outputs and installation manual.

ETIM CLASS

EC002759

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the included protective cover and cable outlet with brush

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60°C

FORMAT
Schuko

HEAT RESISTANCE (°C)
+70°C (according to standard IEC 60670)

IK CLASSIFICATION
07

INSULATION RESISTANCE (V-MΩ)
>5 M? at 500 V

CURRENT (A)
16 A

IP RATING
IP30

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 at +60° C

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
-5...+60

TYPE OF POWER SUPPLY CONNECTOR
Wieland® GST 18i male 3-pole overhead connector with 22 cm patch cord

RAL
9016

RECESS DIMENSION (MM)
318 x 175 mm (± 2mm)

NUMBER OF SOCKETS
12 sockets for standard current circuit

VERSION
12 elements

INSTALLATION AND MAINTENANCE

CABLING ACCESS
With brush

CLAW RANGE OF OPERATION (MM)
Between 20 and 40 mm

NUMBER OF COVER OPENING POSITIONS
2

EXTINGUISHING (ºC)
+70 ºC (according to standard IEC 60670)

TYPE OF FASTENING
By lateral tightening of claws provided with the enclosure. Optional possibility to fasten the enclosure with screws through the provided holes in the sides of the enclosure chassis.

REMOVAL OF THE FRAME
Only with tool

INSTALLATION TYPE
Suitable for recessed mount in furniture.

OPENING ORIENTATION
At 45º and 135º

SECURING POSSIBILITIES
Using supplied claws or screws in the available holes

MOUNTING WITHOUT ACCESSORIES
Supplied with all necessary materials for installation.

REGULATIONS

REGULATIONS
Directiva 2014/35/UE LVD;Directiva 2011/65/UE RoHS;EN 50581:2012;EN 60670-1:2005;EN 60670-1:2005 A1:2013;IEC 60884-1 Ed 3.2;

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053197264

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
3.4

PRODUCT NET WEIGHT
3.4

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053197264

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
370

PACKAGING WIDTH
135

PACKAGING LENGTH
2000

PACKAGING MEASUREMENT UNIT
MMT

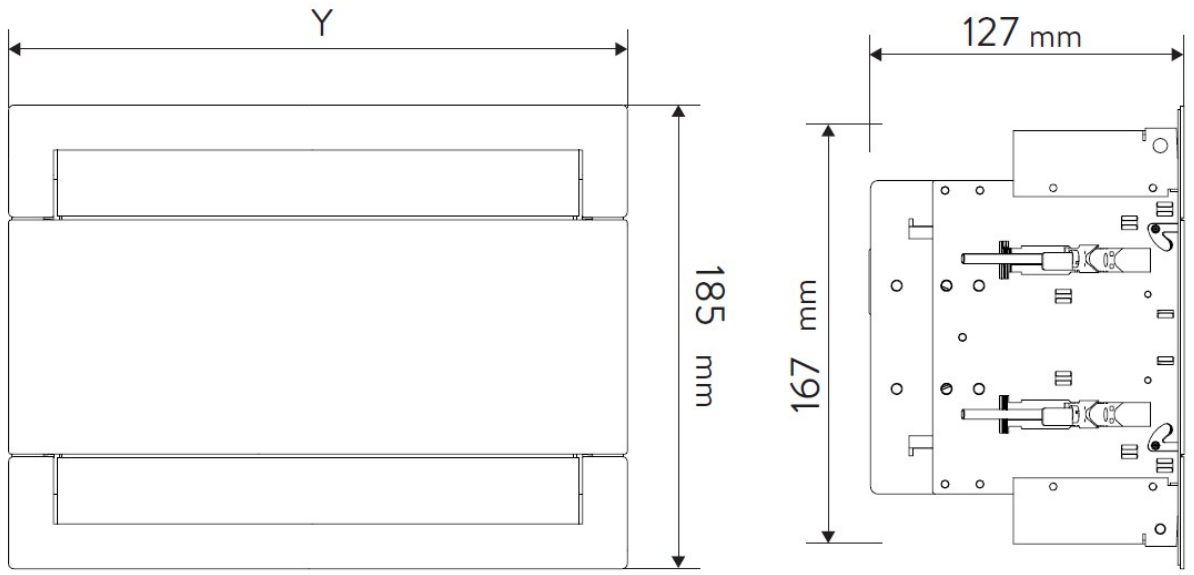
PACKAGING VOLUME
99900000

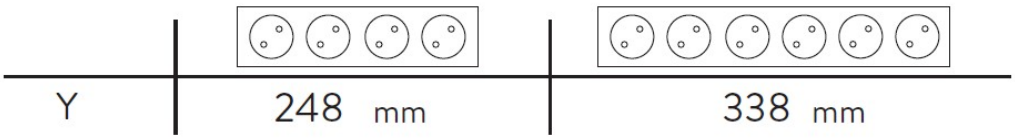
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
3.4

PACKAGING WEIGHT UNIT
KGM


Y
185 mm
127 mm
167 mm


Y
248 mm
338 mm