

SLIM SYSTEM modular luminaire Light module 2700 K Symmetric Optics 0.9 m Black

REF. 90014110-288



BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC001743

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

80x84x1465 mm

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

2300 lm

IP RATING

IP20

DRIVER INCLUDED

No

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

ENERGY EFFICIENCY

A+

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

120/277 V~

L70 (°C)

100000h at 25°C

OPTICS

Symmetric

RAL

9005

L90 (°C)

40000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

COLOR TEMPERATURE (K)

2700 K

COLOR TYPE

WW

POWER FACTOR (Φ)

> 0,9

CRI

80


LIGHTING EFFICIENCY (LM/W)

hasta 94 lm/W

POWER (W)

25 W

PHOTOMETRY ASSETS – POLAR

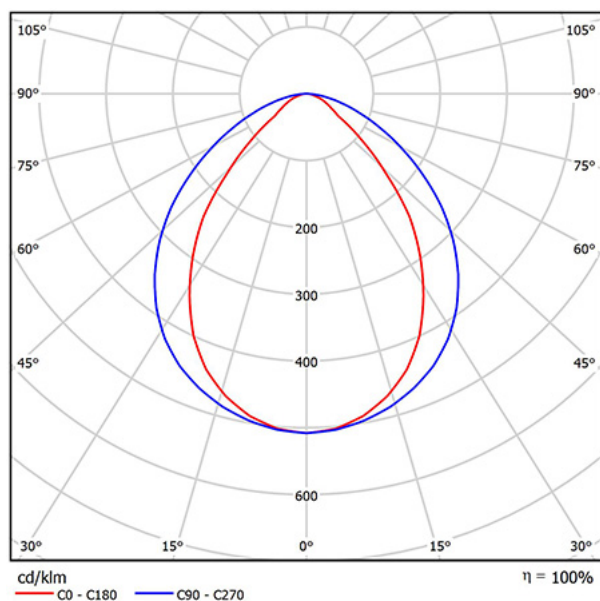

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Suspended

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

No

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547040193

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.61

PRODUCT NET WEIGHT

0.55

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8436547040193

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

79

PACKAGING WIDTH

79

PACKAGING LENGTH

1430

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

10584625

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.61

PACKAGING NET WEIGHT

0.55

PACKAGING WEIGHT UNIT

KGM