Framework for 4 elements in adjustable floor box white Simon 500 Cima

REF. **52051802-030**



BASIC INFORMATION

DESCRIPTION

Element of the floor box Model 52051802-030 of the Simon 500 Cima series professional, makes installation Embedded in concrete floor and raised floor to different systems And installations professionals. Element compatible with other elements belonging To the Simon 500 Cima series. Adjustable floor box that Includes framework for 4 elements, manufactured in material Plastic and finishes in hues of colour white integrates components. Character halogen-free thermoplastic that guarantees no flame propagation in In the case of fire and low toxicity in the event of smoke generation. It is a component It measures 132 x 116 x 16 mm, making Great adaptability and pato to close different systems and installations Professionals with all the guarantees of quality and security.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using a specific adaptor)

PACKAGING CONTENTS

Framework

ETIM CLASS

EC000007

REMARKS

The adjustable floor boxes include the framework. You only need to order it as a spare part in the event of breakage or loss.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

2, 4, 6 and 8 elements

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

4 modules

RAL

9003

VERSION

4 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using screws

INSTALLATION DIRECTION
Horizontal, Vertical

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

REMOVAL OF THE FRAME
Only with tool

INSTALLATION TYPE
In concrete floor and raised floor through the adjustable floor boxes

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254820

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.05

PRODUCT NET WEIGHT
0.05

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093252

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
118

PACKAGING WIDTH
121

PACKAGING LENGTH
264

PACKAGING MEASUREMENT UNIT
MMT

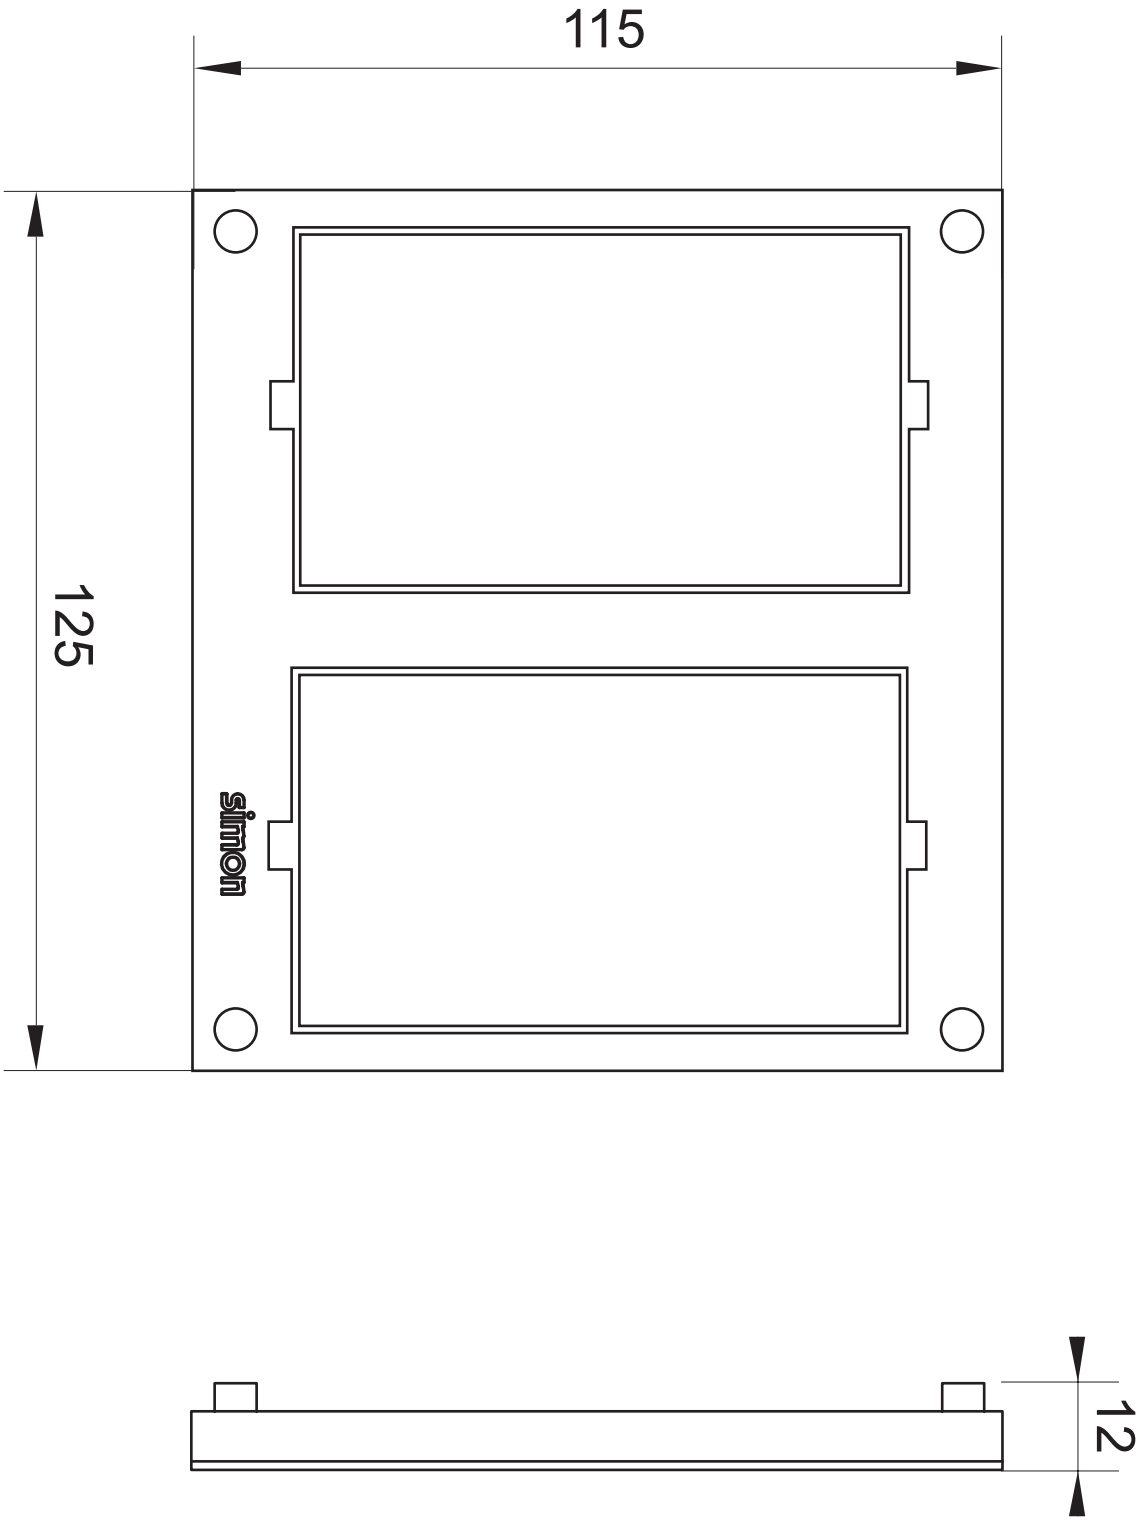
PACKAGING VOLUME
3769392

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.5

PACKAGING WEIGHT UNIT
KGM


115
125
simon
12