


Voice and data flat plate with dust cover for 1 element for
2 RJ45 compatible other manufacturers aluminium Simon
K45

REF. KB76/8

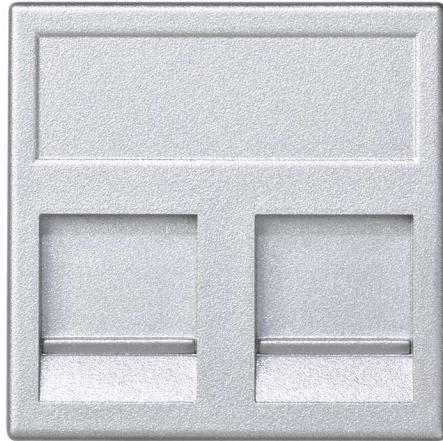

BASIC INFORMATION

DESCRIPTION

Voice and data flat plate of the series Simon K45. It has a dust shutter, an element and is for two RJ45 connectors. It is also compatible with other manufacturers. The product is available in a stylish aluminium finish, which gives the plate of a enviable appearance. The snap-fit of the same is performed by Keystone I, II, ATT, Avaya. It is the individual version, half an element and you can find for both one as for two RJ45 connectors. Its exact dimensions are 45 x 45 millimetres and 8.5 millimetres of depth. It is made of a thermoplastic material, insulation, which increases the security of the plate, as it can withstand temperatures very high, up to + 60 degrees centigrade. To combine this flat base plate of voice and data Simon with vertical enclosures, it is necessary to take the 90 ° positioner (reference: K66). It is possible to the installation of the plate in surface-mounted or flush mounted.

FINISH

Aluminium

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-03X)

PACKAGING CONTENTS

Flat voice and data plate with dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

COMPATIBLE WITH CONNECTORS

Simon®, ADC Krone® Series KM8 Keystone, AMP netconnect® Series SL110 and SL Tool less, BeldenCDT® Series Giga Flex Keystone, Ersys®, General Cable®, Molex®, Nexans® Series essential Keystone, Ortronics® Series Clarity TechChoice Keystone, Panduit® Series Netkey, R&M® Series Advance Cat6A (R509508, R509509), Rit®, Siemon® Series MAX Keystone, Systimax® and manufacturers of RJ45 with snap-fit based on the Keystone I and II format.

RJ45 CONNECTORS

Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

DUST PROTECTION

Yes

FORMAT

RJ45

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Half

PLATE TYPE

Flat

RJ45 ADAPTOR MODULE

Included in voice and data plate

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053264003

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.016

PRODUCT NET WEIGHT

0.016

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8426436065857

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

88

PACKAGING WIDTH

123

PACKAGING LENGTH

136

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.911

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

5.9

PACKAGING NET WEIGHT

0.32

PACKAGING WEIGHT UNIT

KGM