ARCH S Downlight Round 4000 K Wide Flood 1-10 V Black

REF. **91531003-488**



BASIC INFORMATION

BODY MATERIAL
Die-cast aluminium

PACKAGING CONTENTS
1 Unit

APPLICATION
Domestic,Office,Retail,Hotel,Contract

PACKAGING DIMENSIONS (MM)
116x224x171 mm

TECHNICAL INFORMATION

FREQUENCY
50 - 60 Hz

IP RATING
IP43

OPERATING TEMPERATURE RANGE (°C)
0 - 35 °C

POWER SUPPLY (V~)
110/240 V~

RAL
9005

COLOR TEMPERATURE (K)
4000 K

CONTROL
1-10 V,Push Dim

CRI
80

DIRECTIONAL
Yes

DRIVER INCLUDED
Yes

ELECTRICAL CLASS
II

ENERGY EFFICIENCY
A+

L70 (°C)
100000h at 25°C

L90 (°C)
30000h at 25°C

COLOR TYPE
CW

LIGHTING EFFICIENCY (LM/W)
111 lm/W

LUMENS (LM)
750 lm

NUMBER OF LUMINAIRES
1

MACADAM STEPS
<3 Step MacAdam


OPTICS
Wide Flood 60°

PHOTOBIOLOGICAL CLASSIFICATION
Class II

POWER FACTOR (Φ)
> 0,9

POWER (W)
9 W

PHOTOMETRY ASSETS – POLAR

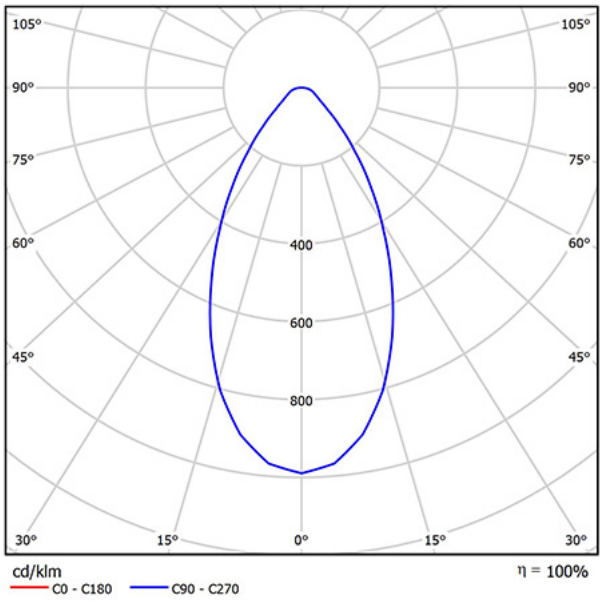

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES
Flush-mounted, Trimless

INSTALLATION TYPE
Surface-mounted

REGULATIONS

EAC MARKED
Yes

ECORRAE MARKED
Yes

WARRANTY
5 years

LOGISTICS INFORMATION

UNITARY EAN CODE
8436547038060

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.32

PRODUCT NET WEIGHT
1.09

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8436547038060

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
116

PACKAGING WIDTH
171

PACKAGING LENGTH
224

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
4567500

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
1.2

PACKAGING NET WEIGHT
1.09

PACKAGING WEIGHT UNIT
KGM