


## Bus coupling unit with KNX system

REF. 8400100-039

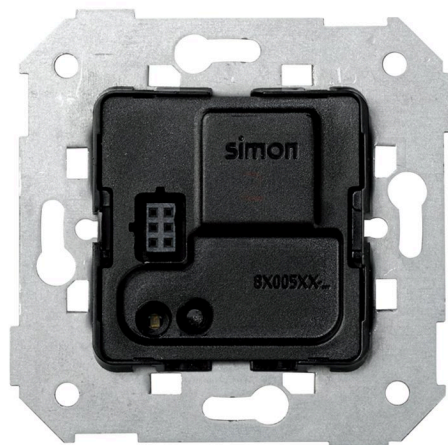

### BASIC INFORMATION

#### PACKAGING CONTENTS

Coupling unit and instructions

#### ETIM CLASS

EC000634

### TECHNICAL INFORMATION

#### AVAILABLE MARKET

CE

#### INDICATOR FUNCTION

No

#### OPERATING TEMPERATURE

RANGE (°C)

0 - 45 °C

#### NUMBER OF POSSIBLE ELEMENTS

1 element

#### IP RATING

IP20

#### POWER SUPPLY (V~)

Bus KNX (21 Vcc...32 Vcc)

## INSTALLATION AND MAINTENANCE

### BUS CABLE SECTION ADMITTED (MM)

From 0.5 to 0.8 mm

### CABLE STRIPPING NECESSARY (MM)

8

### INSTALLATION TYPE

Suitable for surface and flush mounting

### BUS CONNECTION TYPE OF TERMINAL CONNECTION

Por inserción

### CLAW

Optional

### TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

## REGULATIONS

### REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-5:2016

## LOGISTICS INFORMATION

UNITARY EAN CODE

8421053129265

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053129265

PACKAGING VOLUME

0.329

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

57

PACKAGING GROSS WEIGHT

0.09

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

76

PACKAGING NET WEIGHT

0.08

UNITARY PACKAGING GROSS  
WEIGHT

0.08

PACKAGING LENGTH

76

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.08