
Combined two-pole socket (European/American) 16A 250V~ with ground and screw terminal connection white Simon 27 Play

REF. **27439-35**

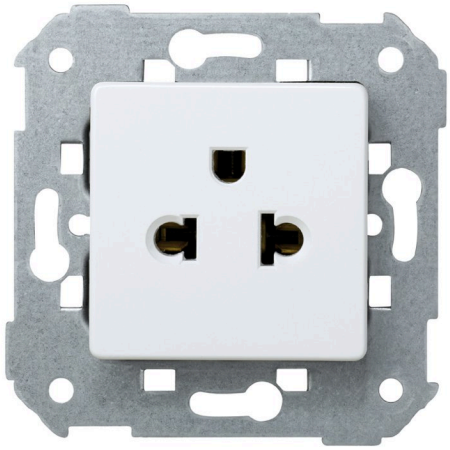

BASIC INFORMATION

DESCRIPTION

Is within the categories of outlets, has a current of 15-16 A and voltage 125-250 V~ of an element, with ground and screw-terminal connection white in colour, it belongs to the Simon 27 Play range. The two-pole socket-outlet mixed (European-American) enjoys operation of insertion, is suitable for 2 modules, this piece is valid for replacement or export. For its installation, it will be enough to apply pressure or place on the surface. The wire section admitted is from 1.5 to 2.5 mm and comes with 10 mm of bare wire. The material is socket metal components with halogen-free thermoplastic insulation and thermoset trim, being able to oscillate between 5 and 40º, and can support up to a maximum of between -25 and 50º C, this article complies perfectly with the regulation IEC 60884-1: 2006 - Ed.3.1. The dimensions are 45x45 mm, although it is available in other sizes and colors. To keep the piece clean, use a soft and dry cloth, under no circumstances be poured abrasive cloths or cleaners with high chlorine content.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Socket outlet with cover

ETIM CLASS

EC000125

REMARKS

Suitable for replacement or export.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS

1 element

FORMAT

Two-pole

INDICATOR FUNCTION

No

CURRENT (A)

16 A

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Insertion

MONOBLOCK

No

NOMINAL VOLTAGE (V~)

125/250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

POWER SUPPLY (V~)

125/250 V~

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
10

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS
IEC 60884-1:2006 - Ed.3.1

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053252130

UNITARY PACKAGING HEIGHT
33

UNITARY PACKAGING WIDTH
45.5

UNITARY PACKAGING LENGTH
45.5

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.068

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.08

PRODUCT NET WEIGHT
0.08

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
7506020300524

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
50

PACKAGING WIDTH
95

PACKAGING LENGTH
225

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1.069

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.8

PACKAGING NET WEIGHT
0.8

PACKAGING WEIGHT UNIT
KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


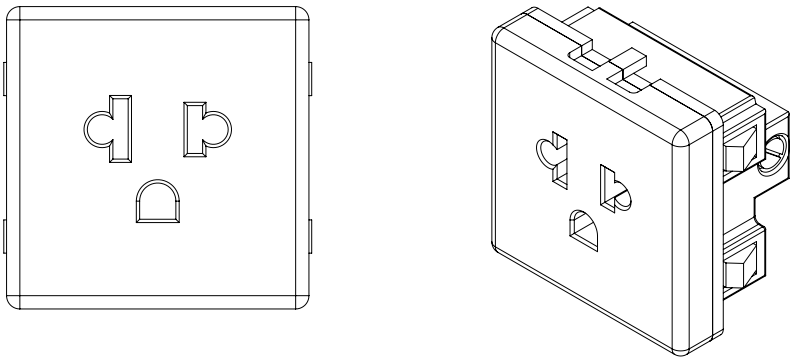


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

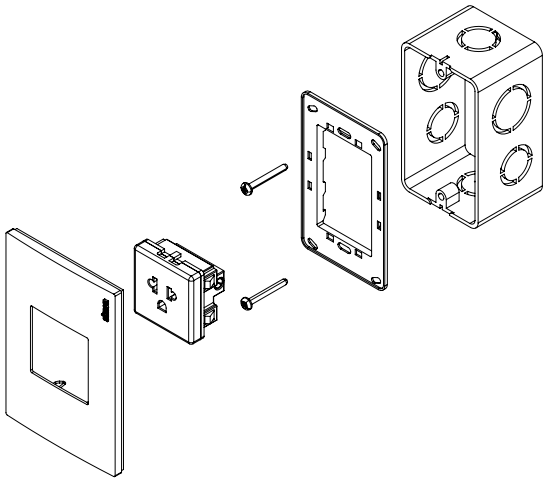