
Rocker with viewer for switch with pilot light for 1 element black Simon K45

REF. **K115/14**

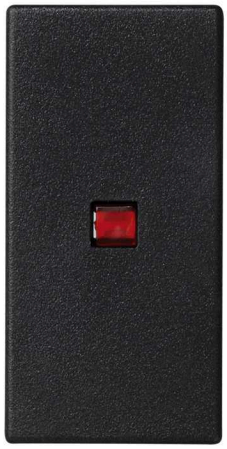

BASIC INFORMATION

DESCRIPTION

Available in quarter and half module versions, the rocker with viewer and pilot light for 2-way switches of the Simon K45 collection, it is the perfect complement to give your 2-way switch a functional and sophisticated finish. With finishes in a stylish black colour, has a size of 45 x 22.5 mm and 10 mm depth that guarantees adapting the set in all types of spaces. Designed for installation both flush mounted and surface-mounted, it adapts to the needs of each room technical and aesthetics. Made of halogen-free thermoplastic, it protects the room in case of fire, which prevents the flame spread and toxicity by smoke; this material allows you to reach a temperature range of 5 more than 60 ºC. 2 control mechanisms with rocker close can not be combined with adaptor plates of Simon Cima-Simon K45.

FINISH

Black

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Rocker and installation manual

ETIM CLASS

EC000011

REMARKS

It is not possible to combine 2 narrow button control mechanisms on a Simon 500 Cima-Simon K45 adapter plate

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

Quarter and half module versions

MAX TEMP DURING CONSTRUCTION WORK (ºC)

+60º C

INDICATOR FUNCTION

Yes

IP RATING

IP20

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)

-5 to 60º C

NUMBER OF MODULES

Four

RAL

7021

VERSION

Single

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
544320

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.062

PRODUCT NET WEIGHT
0.062

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436047167

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
72

PACKAGING WIDTH
72

PACKAGING LENGTH
105

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
544320

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.62

PACKAGING NET WEIGHT
0.62

PACKAGING WEIGHT UNIT
KGM