
# Ofiblock Line frame for 6 elements for recessing into furniture stainless steel Simon K45

REF. **KSF136/8**

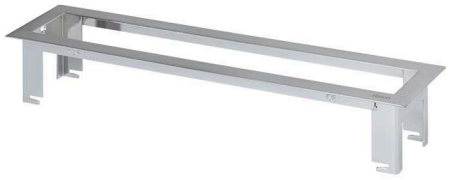

## BASIC INFORMATION

### DESCRIPTION

Ofiblock Line frame for 6 elements to be flush mounted in furniture and finished in stainless steel of the series Simon K45. Available in 1, 2, 4 and 6 elements and allows the installation of any furniture (without using claws) measuring 10 mm in thickness. It has dimensions of 76 x 346 x 58 mm and is manufactured in stainless steel with brushed effect. It can be installed both flush mounted and in furniture, in rooms with a temperature located between the -5 to 60 ° C, although it can withstand extreme temperatures of more than 60 ° C Complies with the regulation European UNE -s 60.670-23 and its cleaning is quite simple, as you only need to wipe it with a soft and dry cloth, never use abrasive cloths or cleaners containing chlorine in its formulation, as it could get damaged and not function correctly.

### FINISH

Stainless steel

### MATERIAL

Metal

### COMPATIBILITY

Simon K45 Ofiblock Line aluminium profiles and Ofiblock Compact

### PACKAGING CONTENTS

Ofiblock Line frame for recessing into furniture, and installation manual.

### ETIM CLASS

EC002759

### REMARKS

Installation of any furniture (without using claws) measuring 10 mm in thickness or above.

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### AVAILABLE IN
Available in 1, 2, 4 and 6 elements.

### MAX TEMP DURING CONSTRUCTION WORK (ºC)
+60º C

### HEAT RESISTANCE (ºC)
+125ºC (according to standard IEC 60670)

### INSULATION RESISTANCE (V-MΩ)
>5 MOhm at 500 V

### IP RATING
IP4X

### KIT AVAILABILITY
No

### LINKABLE
No

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60º C

### NUMBER OF MODULES
6 modules

### RECESS DIMENSION (MM)
330x64 mm

### VERSION
6 elements

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS
Only with tool

### EXTINGUISHING (ºC)
+850 ºC (according to standard IEC 60670)

### TYPE OF FASTENING
Using side screws to fix the Ofiblock Line frame to the furniture. Alternatively, you can use the set of clamps (ref.KSF7) which does not require screwing the Ofiblock Line frame to the furniture.

### REMOVAL OF THE FRAME
Only with tool

### INSTALLATION DIRECTION
Horizontal.

### INSTALLATION TYPE
Suitable for embedding in furniture.

### SECURING POSSIBILITIES
Its design allows recessed integration in any type of furniture

### MOUNTING WITHOUT ACCESSORIES
The frame includes holes on the sides for attachment without needing accessories.

## REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-1:2005

## LOGISTICS INFORMATION

UNITARY EAN CODE

8426436065246

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

2.256

UNITARY PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING GROSS WEIGHT

0.387

PRODUCT NET WEIGHT

0.387

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8426436065246

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

363

PACKAGING WIDTH

74

PACKAGING LENGTH

84

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

2.256

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.441

PACKAGING NET WEIGHT

0.387

PACKAGING WEIGHT UNIT

KGM