


# Flush trim cover for adjustable floor box or 8 elements registry plate graphite Simon 500 Cima

REF. 52053104-038

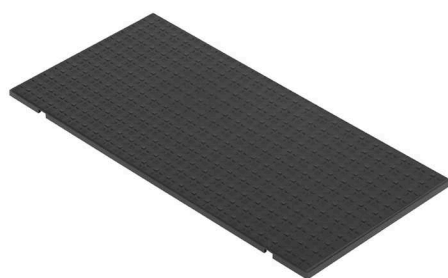

## BASIC INFORMATION

### DESCRIPTION

To protect the electrical installations with innovative elements is the objective of the accessories included in the Simon 500 Cima series. This starting point the complies perfectly the Flush-mount trim cover for adjustable floor box or service cover with eight elements finished in graphite of the Simon 500 Cima series, an element that includes optional element to combine with the floor box if not installing the same floor lining. With dimensions of 118 x 247 x 5 mm, this cover allows you to change the image of our rooms in a simple way, its installation is done in concrete floor and raised floor through the adjustable floor boxes or inspection covers. It has been designed with halogen-free thermoplastic compose its structure, a material that guarantees no flame propagation in case of fire and low toxicity in the event of smoke generation.

### FINISH

Graphite

### PACKAGING CONTENTS

Trim cover

### MATERIAL

Plastic

### ETIM CLASS

EC002417

### REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### IK CLASSIFICATION

08

### TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

### AVAILABLE IN

2, 4, 6, 8 and 12 elements

### INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

### NUMBER OF MODULES

8 modules

### DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

### IP RATING

IP4X

### RAL

7021

### MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

### KIT AVAILABILITY

No

### VERSION

8 elements

### HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COVER

Only with tool

### TYPE OF FASTENING

Using the screws supplied

### INSTALLATION TYPE

In raised or concrete floor with adjustable floor boxes or service covers

### EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

### INSTALLATION DIRECTION

Horizontal, Vertical

## REGULATIONS

### REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT  
0

UNITARY PACKAGING WEIGHT  
UNIT  
KGM

PACKAGING MEASUREMENT  
UNIT  
MMT

UNITARY PACKAGING WIDTH  
0

PACKAGING EAN  
8421053101551

PACKAGING VOLUME  
3.525

UNITARY PACKAGING LENGTH  
0

UNITS CONTAINED PACKAGING  
10

PACKAGING VOLUME UNIT  
DMQ

UNITARY PACKAGING VOLUME  
0

PACKAGING HEIGHT  
75

PACKAGING GROSS WEIGHT  
0

UNITARY PACKAGING GROSS  
WEIGHT  
0.136

PACKAGING WIDTH  
165

PACKAGING NET WEIGHT  
1.36

PRODUCT NET WEIGHT  
0.136

PACKAGING LENGTH  
290

PACKAGING WEIGHT UNIT  
KGM

