
Flush-mount wall box base for 4 double elements white Simon 500 Cima

REF. **51050004-030**

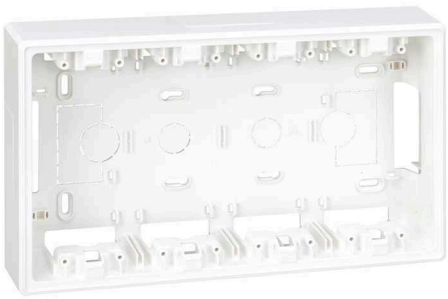

BASIC INFORMATION

FINISH
White

MATERIAL
Plastic

COMPATIBILITY
Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using specific adaptors), combinable with the Simon Trunking range

PACKAGING CONTENTS
Surface-mount box base, fixing studs, screws, installation manual

ETIM CLASS
EC002328

REMARKS
Alternatively, you can screw the frame holders into the box base if you need additional fastening.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 3 and 4 dual elements

NUMBER OF CLAMP-HOLDER HOLES
16

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

NUMBER OF ENCLOSURES FOR GROUND CONNECTION
2

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

IK CLASSIFICATION
07

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
8

NUMBER OF PRE-PUNCHED HOLES 30 X 50 MM
2

NUMBER OF PRE-PUNCHED HOLES 40 X 80 MM
0

RAL
9003

NUMBER OF SIDE ENTRANCES
5

VERSION
4 double elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface-mount wall installation

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60670-1:2005 + IEC 60884-1 Ed 3.2

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053101254

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.465

PRODUCT NET WEIGHT
0.465

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101254

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
75

PACKAGING WIDTH
165

PACKAGING LENGTH
290

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
3.589

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.465

PACKAGING WEIGHT UNIT
KGM

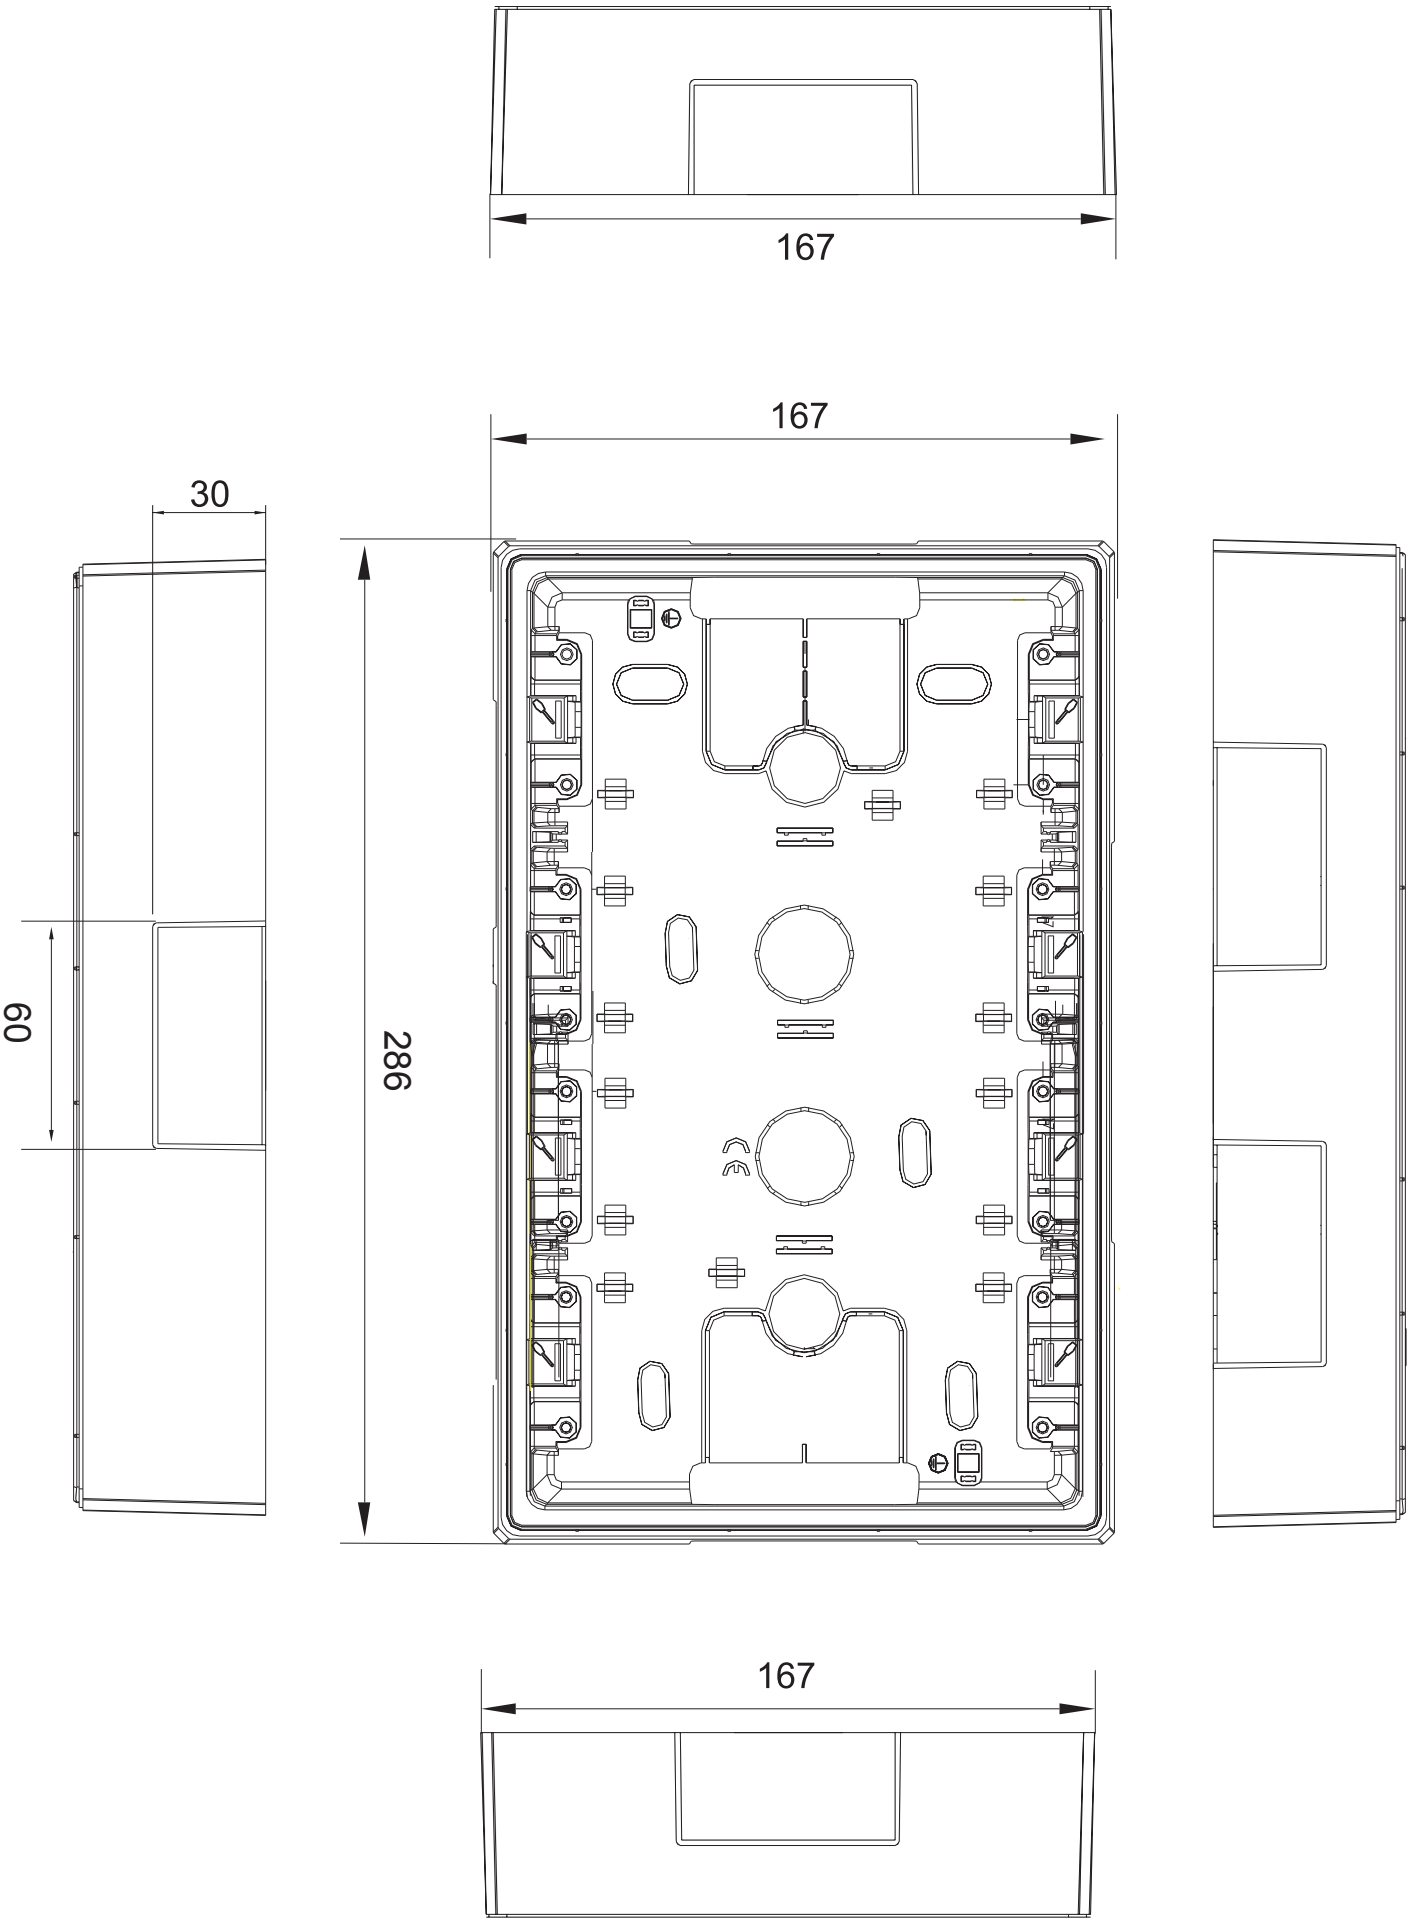
167
167
30
60
286
167