


## USB C charger 20W Power Delivery copper Simon 270

REF. 20000382-091

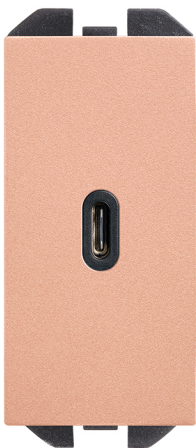

### BASIC INFORMATION

#### FINISH

Copper

#### MATERIAL

Thermoplastic

#### ETIM CLASS

EC002949

#### SYMBOL

PD

#### COMPATIBILITY

Simon 270 frames

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### FORMAT

USB

### FREQUENCY

50 - 60 Hz

### IP RATING

IP20

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### MONOBLOCK

No

### NOMINAL VOLTAGE (V~)

230 V~

### OPERATING TEMPERATURE RANGE (°C)

0 - 35°C

### POWER SUPPLY (V~)

127/230 V~

### RAL

1035

### USB PORT TYPE

C

### VOLTAGE (V~)

127/230 V~

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)

7

### INSTALLATION DIRECTION

Horizontal, Vertical

### TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

## LOGISTICS INFORMATION

UNITARY EAN CODE

8421053353271

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053353271

PACKAGING VOLUME

143000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

55

PACKAGING GROSS WEIGHT

0.057

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

40

PACKAGING NET WEIGHT

0.043

UNITARY PACKAGING GROSS  
WEIGHT

0.057

PACKAGING LENGTH


65

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.043

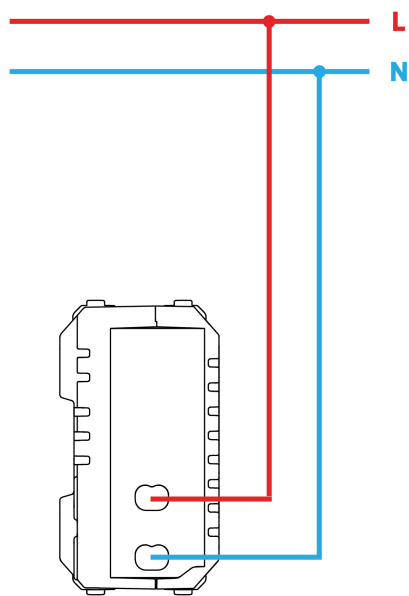

Para información más detallada consultar la hoja de instrucciones  
For more detailed information check the instruction sheet