
# Ceiling trim for square column with 2 sides white Simon K45

REF. **RALK002/8**

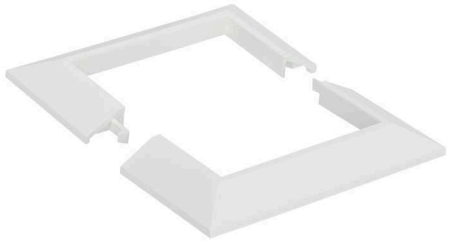

## BASIC INFORMATION

### DESCRIPTION

It is a ceiling trim indicated for a pole of 2 sides, square. Finished in white, the piece belongs to the series Simon K45 and has dimensions of 117 x 117 x 12 mm This manufactured in halogen-free thermoplastic material, very safe in case of fire, as prevents extend the fire and reduces the toxicity if there is smoke. The trim is in compliance with current regulations. It is, in fact, a product envisaged as a replacement part, in the event of loss or substitution. It delivers injected in white plastic colour. As for its maintenance, it is advisable to clean the article with a soft and dry cloth, it is not advisable to use abrasive cloths and cleaners containing chlorine. Simon K45 is a collection designed to facilitate connectivity in the work stations. Its products have been designed to offer all kinds of connections in a single space.

### FINISH

White

### PACKAGING CONTENTS

Ceiling trim

### MATERIAL

Plastic

### ETIM CLASS

EC002980

### REMARKS

Product envisaged as a replacement part, in the event of loss or substitution. It is supplied injected in white plastic.

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### AVAILABLE IN
1-sided, 2-sided (square and oval) and 4-sided

### DIELECTRIC STRENGTH
Without perforation or contournament with 2000 V at 50H during 1 minute

### MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

### EARTHING RESISTANCE
< 0.05 ?

### HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

### INSULATION RESISTANCE (V-MΩ)
5 MOhms at 500 V.

### IP RATING
IP4X

### KIT AVAILABILITY
No

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 a 120° C

### RAL
9003

### VERSION
2-sided, (Square)

## INSTALLATION AND MAINTENANCE

### TYPE OF FASTENING
Through direct snap-fit of the two parts on the column profile (does not require the use of tools for fastening)

### INSTALLATION DIRECTION
Horizontal

## REGULATIONS

### REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

## LOGISTICS INFORMATION

UNITARY EAN CODE
8426436056411

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.03

PRODUCT NET WEIGHT
0.03

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436056411

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
20

PACKAGING WIDTH
150

PACKAGING LENGTH
100

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.003

PACKAGING VOLUME UNIT
HLT

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.03

PACKAGING WEIGHT UNIT
KGM