


Regulator 250V phase-cut 2 wires for LED Simon 75

REF. 7502313-039

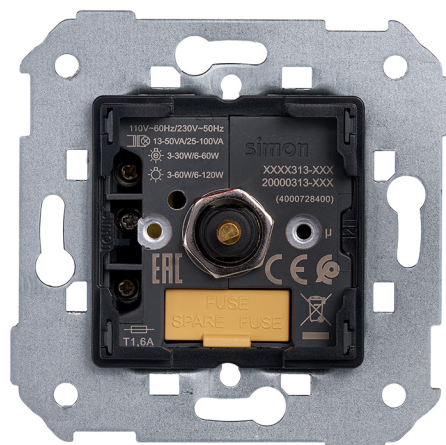

BASIC INFORMATION

DESCRIPTION

The schuko socket base with double USB A + C charger 10.5W Simon 75 is the perfect solution for those looking for a power outlet with integrated USB that combines functionality, design, and maximum safety. This mechanism allows connecting conventional electrical devices via a schuko plug 16 A 250 V~, while also offering direct charging for mobile phones, smartphones, tablets, and other electronic devices thanks to its USB type A and USB type C ports. With a total power of 10.5W and an output of 5Vdc up to 2.1 A, this schuko base with dual USB enables efficient charging of Android and iOS devices without the need for additional adapters. It is ideal for homes, offices, hotels, and commercial spaces that require modern and discreet charging solutions. Its screw terminal connection system ensures a safe and professional installation, accommodating cable sections from 1.5 to 2.5 mm². Designed for flush or surface installation in a universal box, it occupies 1 double element and maintains the refined aesthetics characteristic of the Simon 75 series. With an IP20 protection rating and compliance with LVD, EMC, and RoHS regulations, it offers reliability, durability, and safety in daily use. The schuko socket with USB A+C Simon 75 is the ideal option for modernizing electrical installations, optimizing spaces, and providing a power socket with an integrated USB charger that meets the current needs for connectivity and charging.

MATERIAL

Plastic,Metal

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

Yes

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

COMPATIBILITY

Marcos Simon 27, Simon 31,
Simon 75, Simon 82 Concept,
Simon 82 Detail, Simon 82
Nature, Simon 82 Concept and
Simon 82.

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)

6-120 W

COMPATIBLE WITH MECHANICAL SWITCH

No

ETIM CLASS

EC000025

REMARKS

In the same circuit, two electronic voltage regulators cannot be connected. It has a potentiometer for adjusting the minimum regulation level of the lamps.

TECHNICAL INFORMATION

ACOUSTIC FUNCTION

No

FREQUENCY

50 Hz

MONOBLOCK

Yes

COMPATIBLE WITH ELECTRONIC AUXILIARY

No

INDICATOR FUNCTION

No

NOMINAL VOLTAGE (V~)

230 V~

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST

No

IP RATING

IP20

POWER SUPPLY (V~)

230 V~

LINKABLE

No

RECESS DIMENSION (MM)

45

MAXIMUM POWER (W)

60

VOLTAGE (V~)

230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

REMOVAL OF COVER

Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

CLAW

Simon 27

INSTALLATION DIRECTION

Horizontal, Vertical

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053284636

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.134

PRODUCT NET WEIGHT

0.134

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053284636

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

329232

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.134

PACKAGING WEIGHT UNIT

KGM

