

**Push-button switch with bell symbol 10A 250V~ for half
element, light indicator and fast terminal connection ivory
Simon 27 Play**

REF. 27160-61



BASIC INFORMATION

DESCRIPTION

Push-button switch with bell symbol engraving with an intensity of 10 A and a power of 250 V~ medium element, with incorporated luminous light and which includes the fast-terminal connection system with ivory finish and belonging to the Simon 27 Play series. The element is combinable with the reference 2700802-064 in case of replacement of the indicator light. As far as the installation is concerned, thanks to the fast-terminal connection system, it will be possible to leave it installed and set up without any problem in the shortest possible time, and you also have two options enabled for the installation, being able to perform the installation in surface-mounted or to be recessed. Discover the premise of the Simon 27 Play series that consists in enjoying decorating, creating a revolutionary concept that allows you to take the initiative to redecorate spaces in your home.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC000029

REMARKS

Can be combined with article 2700802-064 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CONSUMPTION INDICATOR (mA)

0.55 mA

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

Half element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small
spaces and Centralisations

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251669

UNITARY PACKAGING HEIGHT

22.5

UNITARY PACKAGING WIDTH

38.5

UNITARY PACKAGING LENGTH

45.5

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0.039

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.022

PRODUCT NET WEIGHT

0.02

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053035825

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

53

PACKAGING WIDTH

160

PACKAGING LENGTH

220

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1.866

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.44

PACKAGING NET WEIGHT


0.4

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

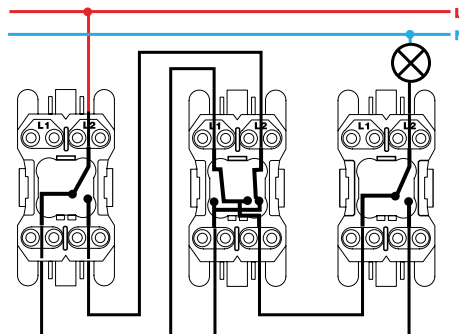


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

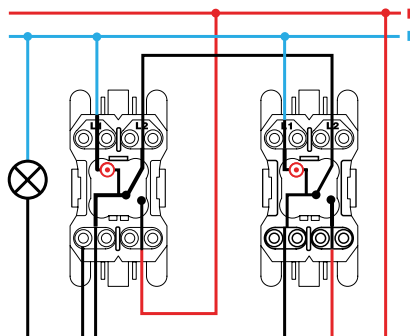


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

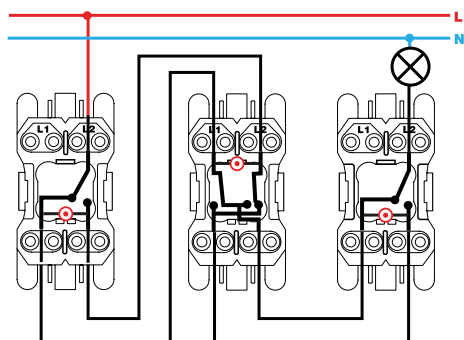

Conmutador cruce / Intermediate switch
XX2700254-XX