
Framework for 6 elements in adjustable floor box graphite Simon 500 Cima

REF. **52051803-038**

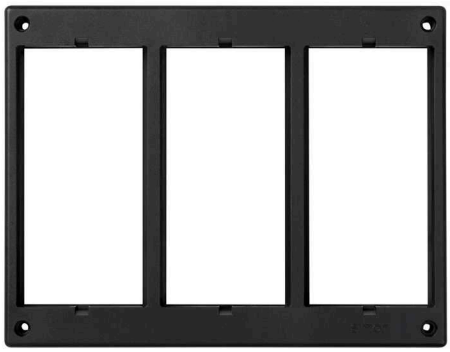

BASIC INFORMATION

DESCRIPTION

With the elegance of Graphite, the framework for six elements of the collection Simon 500 Cima flush-mounted, is designed to be installed both in concrete or raised floor, thanks to the adjustable floor box, to suit every room and style. Manufactured with halogen-free thermoplastic materials, it guarantees the security of the no flame propagation and smoke poison in case of fire, reaching to reach a temperature range of -5 °C and 60 °C. Its design discreet, with finishes in stylish Graphite, it adds an innovative integrated design that each of its elements to the surface-mounted installation; provides security, thanks to the thermoplastic, and maximize the functionality. This makes the frame holder tandem mechanisms and adjustable floor box Simon 500 Cima, the decision perfect for combining style, security, innovation and functionality in a single space.

FINISH

Graphite

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using a specific adaptor)

PACKAGING CONTENTS

Framework

ETIM CLASS

EC000007

REMARKS

The adjustable floor boxes include the framework in a white finish. It is recommended to combine this product with the graphite-finish adjustable floor boxes.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

2, 4, 6 and 8 elements

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

6 modules

RAL

7021

VERSION

6 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using screws

INSTALLATION DIRECTION
Horizontal, Vertical

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

REMOVAL OF THE FRAME
Only with tool

INSTALLATION TYPE
In concrete floor and raised floor through the adjustable floor boxes

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254844

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.065

PRODUCT NET WEIGHT
0.065

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093313

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
100

PACKAGING WIDTH
135

PACKAGING LENGTH
347

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
4684500

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.65

PACKAGING WEIGHT UNIT
KGM

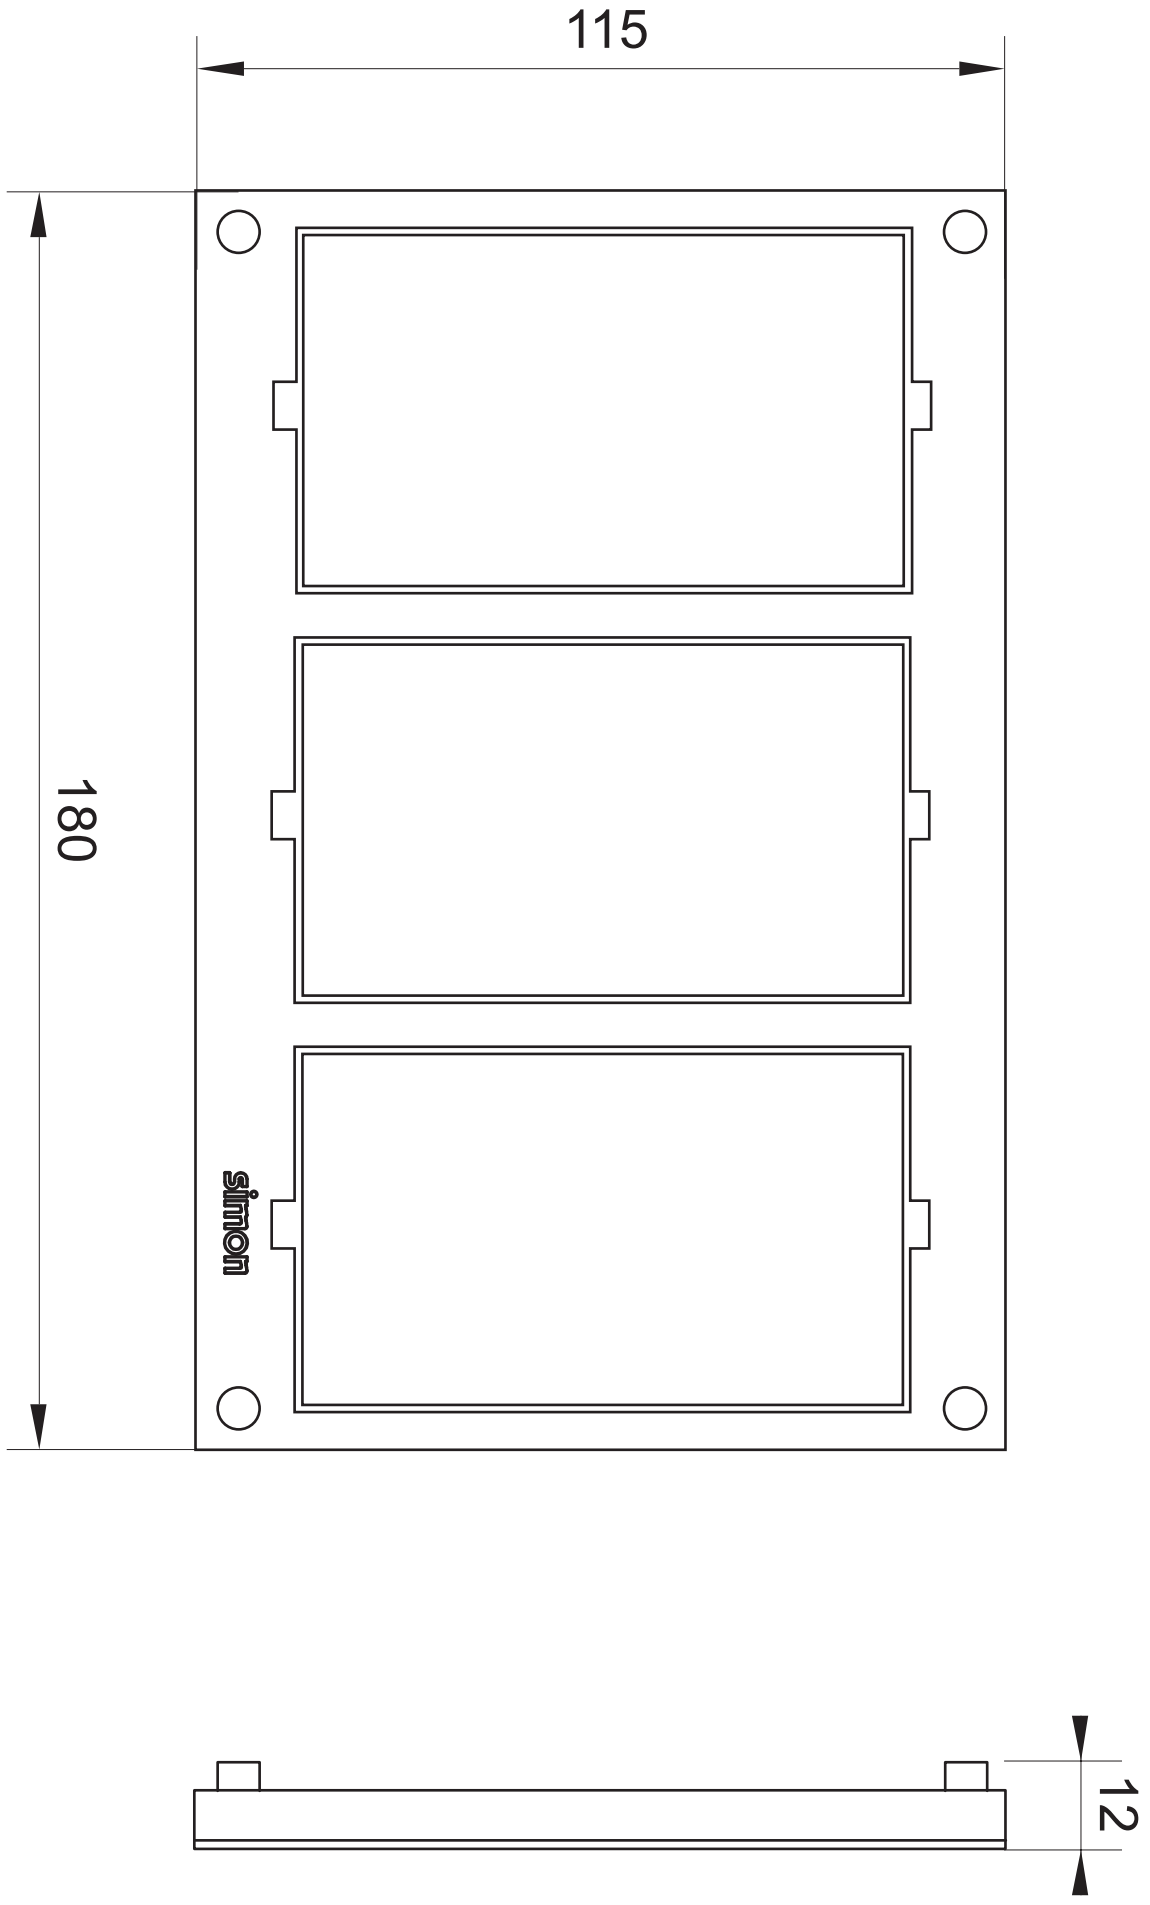
115
180
simon
12